TRONIX guided by light

RF | LED driver | 250-1000mA | 30W

ARTICLE NUMBER: 214-184

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

RF-dimmable LED driver with constant current output for wireless control of single-colour lighting. Adjustable from 250 to 1000 mA, 30 W output power, suitable for panels and downlights.

Key product features

- **Control method:** RF
- **Number of colour channels:** 1
- **Output voltage (V):** 3 – 43
- **Input voltage (V):** 100 – 240
- **Output current (mA):** 250 – 1000
- **Output power (W):** 30
- **Control type:** Constant current


Technical specifications:

Product Name	RF | LED driver | 250-1000mA | 30W
Ean	8714984946132
Outer box qty	64st
Housing	Plastic housing
Model	Static
Output voltage	8 - 48V
Output current	250 - 1000mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	No
Output power	2 - 30W
Degree of protection (IP)	IP20
Length	170mm
Width	53.4mm
Height	28mm
Power consumption	30W

17.11.2026 - Disclaimer: information subject to change.

Input voltage	200 - 240V
Frequency input voltage	50 - 60Hz
Overload protection	Yes
Overtemperature protection	Yes
Control method	RF
Short-circuit protected	Yes
Ambient temperature	-20 - 45??C
Driver lifetime	100000h
DIN-rail mounting	No
Brand	Tronix Lighting
Dimmable	Yes
Emergency power supply system	None
Control type	Constant current
Warranty	5 years

17.11.2026 - Disclaimer: information subject to change.

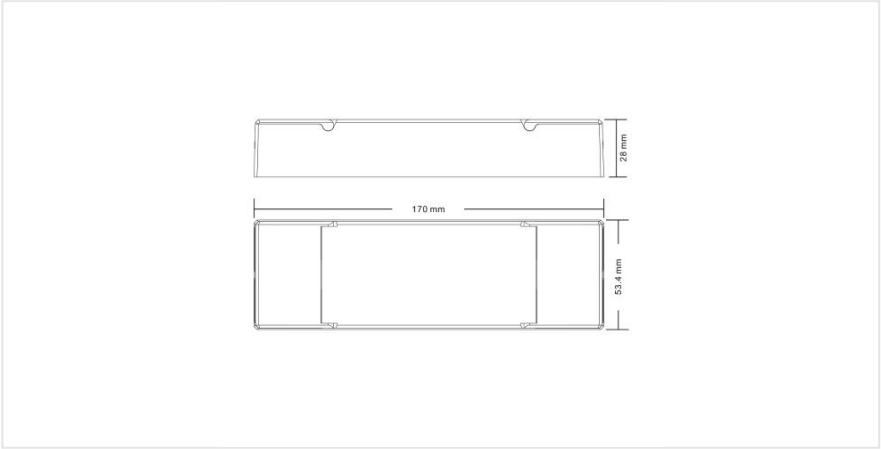

17.11.2026 - Disclaimer: information subject to change.