Batten light || 600mm | 10~25W | IP20 | 3-CCT

ARTICLE NUMBER: 136-305

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

Robust surface-mounted luminaire with adjustable output and colour temperature. Ideal for through-wiring and suitable for technical areas, corridors, and storage spaces.

Key product features:

- **Suitable for surface mounting:** Yes
- **Colour temperature (K):** 3000 – 5700
- **Length (mm):** 600
- **Width (mm):** 124
- **Max. system power (W):** 25
- **Type of wiring:** Suitable for through-wiring

Technical specifications:

Product Name	Batten light || 600mm | 10~25W | IP20 | 3-CCT
Ean	8714984933170
Outer box qty	12st
Dimmable	No
Connection type	Push-in clamp
Lamp type	LED not exchangeable
Housing colour	White
Material	Plastic
Length	60cm
Length	600mm
Width	124mm
Height/depth	68mm
With movement sensor	No
With presence detector	No
With light sensor	No


17.11.2026 - Disclaimer: information subject to change.


Colour of light	White
Colour temperature	3000 - 4000 - 5700K
Colour rendering index CRI	80-89
Colour of light adjustable	Positions
Luminous flux adjustable	Positions
Beam angle adjustable	No
Voltage type	AC
Nominal voltage	232 - 232V
Nominal current	43 - 109mA
Number of poles	3
Light distributor	Diffuser lens/optic/panel
Connectable conductor cross section	0.75 - 2.5mm??
Type of control gear	LED operating device current-controlled
Exchangeable control gear	No
With control gear	Yes
Degree of protection (IP)	IP20
Impact strength	IK08
Rated lifetime L70/B50 at 25 ??C	60000h
Max. system power	25W
Rated luminous flux according to IEC 62722-2- 1	1300 - 3250lm
Luminaire efficacy	130lm/W
Power factor	0.96
Type of wiring	Suitable for loop-through wiring
Suitable for emergency lighting	No
Emergency power supply system	None
Emergency function monitoring system	None

17.11.2026 - Disclaimer: information subject to change.

Warranty	5 years



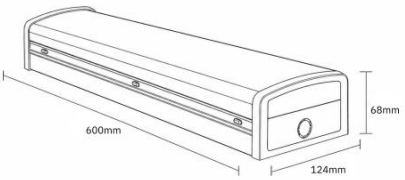

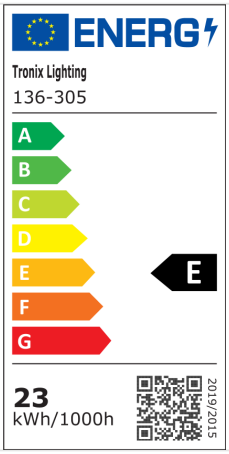

17.11.2026 - Disclaimer: information subject to change.