TRONIX guided by light

# Ceiling light | Ø180mm | 8 Watt | 3-CCT

ARTICLE NUMBER: 136-006

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

Versatile ceiling fixture with adjustable Colour temperature (3000K, 4000K, 6000K) and opal cover for uniform light distribution. Compact Ø180 x 70 mm, easy to install, and suitable for various applications.

**Key product features:**

- **Colour temperature (K):** 3000 - 6000
- **Material cover:** Plastic, opal
- **Outer diameter (mm):** 180
- **Max. system power (W):** 8
- **Colour of light adjustable:** Positions

**Technical specifications:**

| | |
|---|---|
| Product Name | Ceiling light \| Ø180mm \| 8 Watt \| 3-CCT |
| Ean | 8714984949096 |
| Outer box qty | 30st |
| Lamp type | LED not exchangeable |
| Housing material | Aluminium |
| Housing colour | White |
| Material cover | Plastic, opal |
| Suitable for emergency lighting | No |
| Nominal current | 110 - 110mA |
| Voltage type | AC |
| Type of control gear | LED operating device current-controlled |
| With control gear | Yes |
| Outer diameter | 180mm |
| Constant light output (CLO) | No |
| Type of grid | Matt |
| Nominal voltage | 220 - 240V |
| Height/depth | 70mm |

17.11.2026 - Disclaimer: information subject to change.

| | |
|---|---|
| Colour of light | White |
| Colour rendering index CRI | 70-79 |
| Exchangeable control gear | No |
| Dimming 0-10 V | No |
| Dimming 1-10 V | No |
| Dimming DALI | No |
| Dimming phase cut-off (trailing edge) | No |
| With movement sensor | No |
| With presence detector | No |
| Impact strength | IK02 |
| With light sensor | No |
| Suitable for surface mounting | Yes |
| Suitable for built-in mounting | No |
| Light distribution | Symmetric |
| Beam angle | > 80° - Extreme wide beam |
| Light outlet | Direct |
| Dimming RF | No |
| Dimming Zigbee | No |
| Light distributor | Other |
| Surface protection housing | Lacquered |
| Colour consistency (McAdam ellipse) | SDCM6 |
| Rated lifetime L70/B50 at 25 °C | 30000h |
| Colour of light adjustable | Positions |
| Luminous flux adjustable | No |
| Max. system power | 8W |
| Beam angle adjustable | No |
| Power factor | 0.9 |


17.11.2026 - Disclaimer: information subject to change.


| | |
|---|---|
| Type of wiring | Ending |
| Number of poles | 3 |
| Compatible with Casambi | No |
| Luminaire efficacy | 90 - 90lm/W |
| Dimmable | No |
| Rated luminous flux according to IEC 62722-2- 1 | 720 - 720lm |
| Emergency power supply system | None |
| Suitable for ceiling mounting | Yes |
| Connectable conductor cross section | 0.75 - 0.75mm² |
| Suitable for wall mounting | Yes |
| Suitable for suspended mounting | No |
| Suitable for workplace according to EN 12464-1 | No |
| Degree of protection (IP), front side | IP44 |
| With mounting material | Yes |
| Colour temperature | 3000 - 4000 - 6000K |
| With connection cord and plug | No |
| Warranty | 5 years |
| Ambient temperature | -20 - 40°C |

17.11.2026 - Disclaimer: information subject to change.





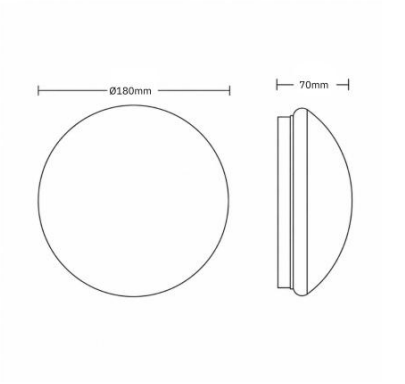

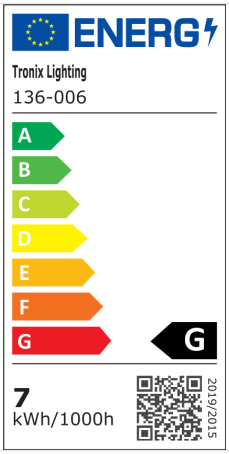
17.11.2026 - Disclaimer: information subject to change.