# Ceiling light || Ø283mm | 5/10W | IP44 | 3000/4000K | sensor

ARTICLE NUMBER: 136-222

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

This ceiling light (Ø 283 mm) features 2-CCT (3000K/4000K), switchable wattage (5W/10W), and a high-frequency motion sensor. The opal cover ensures uniform light distribution, while the IK10 rating guarantees maximum Impact strength.

**Key product features:**

- **Colour temperature (K):** 3000 - 4000
- **Material cover:** Plastic, opal
- **Outer diameter (mm):** 283
- **With movement sensor:** Yes
- **Impact strength:** IK10
- **Max. system power (W):** 10
- **Movement sensor technology:** High frequency

**Technical specifications:**

| | |
|---|---|
| Product Name | Ceiling light \|\| Ø283mm \| 5/10W \| IP44 \| 3000/4000K \| sensor |
| Ean | 8714984948594 |
| Outer box qty | 10st |
| Lamp type | LED not exchangeable |
| Housing material | Plastic |
| Housing colour | White |
| Material cover | Plastic, opal |
| Suitable for emergency lighting | No |
| Nominal current | 190 - 190mA |
| Voltage type | AC |
| Type of control gear | LED operating device current-controlled |
| With control gear | Yes |
| Outer diameter | 283mm |
| Constant light output (CLO) | No |
| Type of grid | Matt |

17.11.2026 - Disclaimer: information subject to change.

| | |
|---|---|
| Nominal voltage | 220 - 240V |
| Height/depth | 90mm |
| Colour of light | White |
| Colour rendering index CRI | 80-89 |
| Exchangeable control gear | No |
| Dimming 0-10 V | No |
| Dimming 1-10 V | No |
| Dimming DALI | No |
| Dimming phase cut-off (trailing edge) | No |
| With movement sensor | Yes |
| With presence detector | No |
| Impact strength | IK10 |
| With light sensor | No |
| Suitable for surface mounting | Yes |
| Suitable for built-in mounting | No |
| Light distribution | Symmetric |
| Beam angle | > 80° - Extreme wide beam |
| Light outlet | Direct |
| Dimming RF | No |
| Dimming Zigbee | No |
| Light distributor | Other |
| Surface protection housing | Lacquered |
| Colour consistency (McAdam ellipse) | SDCM6 |
| Rated lifetime L70/B50 at 25 °C | 50000h |
| Colour of light adjustable | Positions |
| Luminous flux adjustable | No |
| Max. system power | 10W |


17.11.2026 - Disclaimer: information subject to change.


| | |
|---|---|
| Beam angle adjustable | No |
| Power factor | 0.9 |
| Type of wiring | Ending |
| Number of poles | 3 |
| Compatible with Casambi | No |
| Luminaire efficacy | 110 - 110lm/W |
| Dimmable | No |
| Rated luminous flux according to IEC 62722-2- 1 | 550 - 1100lm |
| Emergency power supply system | None |
| Suitable for ceiling mounting | Yes |
| Connectable conductor cross section | 0.75 - 0.75mm² |
| Suitable for wall mounting | Yes |
| Suitable for suspended mounting | No |
| Movement sensor/presence detector technology | High frequency |
| Suitable for workplace according to EN 12464-1 | No |
| Degree of protection (IP), front side | IP44 |
| With mounting material | Yes |
| Colour temperature | 3000 - 4000K |
| With connection cord and plug | No |
| Warranty | 3 years |
| Ambient temperature | -25 - 40°C |

17.11.2026 - Disclaimer: information subject to change.





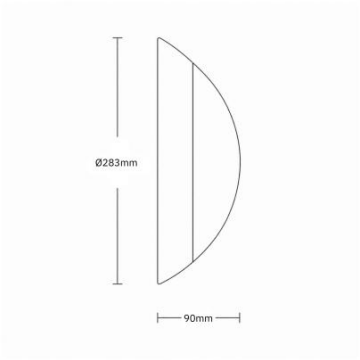

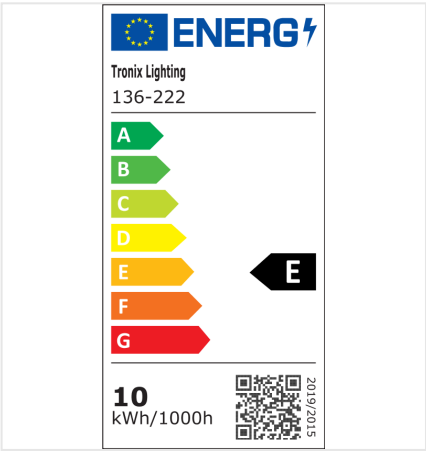
17.11.2026 - Disclaimer: information subject to change.