# Downlight 3-CCT | cut out Ø192-210mm | 14W/20W

ARTICLE NUMBER: 136-129

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

This 3-CCT downlight provides glare-free lighting with a low viewing angle and UGR rating. Features a 3-CCT switch (3000K, 4000K, 6000K) and adjustable Max. system power (70%/100%). Comes with a driver and plug for fast installation.

**Key product features:**

- **Max. system power (W):** 14 - 20
- **Colour temperature (K):** 3000 - 6000
- **Housing colour:** White
- **Outer diameter (mm):** 230
- **Light distributor:** Diffuser lens/optic/panel
- **Built-in diameter (mm):** 192 - 210
- **Connection type:** Plug

**Technical specifications:**

| | |
|---|---|
| Product Name | Downlight 3-CCT \| cut out Ø192-210mm \| 14W/20W |
| Ean | 8714984946903 |
| Outer box qty | 12st |
| Lamp type | LED not exchangeable |
| Lamp holder | None |
| Housing colour | White |
| Housing material | Aluminium |
| Material cover | Plastic matt/satinized |
| Connection type | EU plug |
| Height/depth | 94mm |
| Outer diameter | 230mm |
| Built-in length | - - -mm |
| Built-in width | - - -mm |
| Built-in height | 75 - -mm |
| Built-in diameter | 192 - 210mm |

17.11.2026 - Disclaimer: information subject to change.

| | |
|---|---|
| Suitable for built-in mounting | Yes |
| Suitable for surface mounting | No |
| Suitable for pedestal/floor mounting | No |
| Suitable for wall mounting | No |
| Suitable for ceiling mounting | Yes |
| Suitable for light-track mounting | No |
| Suitable for clamp-mounting | Yes |
| With movement sensor | No |
| With presence detector | No |
| With light sensor | No |
| Colour of light | White |
| Colour consistency (McAdam ellipse) | SDCM6 |
| Colour of light adjustable | Positions |
| Reflector colour | White |
| Colour temperature | 3000 - 4000 - 6000K |
| Colour rendering index CRI | 80-89 |
| Luminous flux adjustable | No |
| Light outlet | Direct |
| Beam angle | > 80° - Extreme wide beam |
| Beam angle adjustable | No |
| Voltage type | AC |
| Nominal voltage | 220 - 240V |
| Nominal current | 250 - 350mA |
| Number of poles | 2 |
| Light distributor | Diffuser lens/optic/panel |
| Light distribution | Symmetric |
| Connectable conductor cross section | 0.75 - 2.5mm² |

17.11.2026 - Disclaimer: information subject to change.


| | |
|---|---|
| Type of control gear | LED operating device current-controlled |
| Exchangeable control gear | No |
| With control gear | Yes |
| Degree of protection (IP), front side | IP44 |
| Degree of protection (IP), rear side | IP20 |
| Surface protection | Lacquered |
| Impact strength | IK02 |
| Rated lifetime L70/B50 at 25 °C | 50000h |
| Max. system power | 40W |
| Rated luminous flux according to IEC 62722-2- 1 | 1540 - 2200lm |
| Luminaire efficacy | 110 - 110lm/W |
| Power factor | 0.9 |
| Suitable for lamp power | 0 - 0W |
| Dimming method | Non-dimmable |
| Surface brushed | No |
| Type of wiring | Ending |
| Emergency power supply system | None |
| Emergency function monitoring system | None |
| Adjustability | not adjustable |
| Reflector | None |
| Warranty | 5 years |
| Ambient temperature | -20 - 40°C |
| UGR level (Unified Glare Rating) | = 19 |


17.11.2026 - Disclaimer: information subject to change.







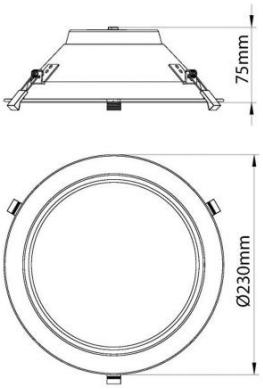

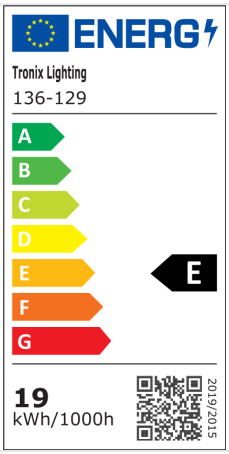
17.11.2026 - Disclaimer: information subject to change.