eldoLED ECOdrive EC25CA-E1ZHP | 350~700mA | 25W | TE dim

ARTICLE NUMBER: 215-662

View this product in our webshop

eldoLED



17.11.2026 - Disclaimer: information subject to change.

Trailing edge LED driver (25 W) for compact spots and downlights. Smooth dimming down to 1%, featuring low inrush current, high power factor, and adjustable output current (350/500/550/700 mA) via 4-position DIP switch.

Key product features

- **Suitable for constant current:** Yes
- **Output voltage (V):** 20 – 39
- **Output current (mA):** 350 – 700
- **Output power (W):** 7 – 25.9
- **Dimmig phase cut-off (trailing edge):** Yes
- **Control type:** Constant current

Technical specifications:

Product Name	eldoLED ECOdrive EC25CA-E1ZHP | 350~700mA | 25W | TE dim
Ean	8714984952188
Outer box qty	50st
Housing	Plastic housing
Model	Static
Output voltage	20 - 39V
Output current	350 - 700mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	Yes
Output power	7 - 25W
Degree of protection (IP)	IP20
Length	150.5mm
Width	42.1mm
Height	27.9mm
Power consumption	25W

17.11.2026 - Disclaimer: information subject to change.


Input voltage	220 - 240V
Frequency input voltage	0 - 50Hz
Overload protection	Yes
Overtemperature protection	Yes
Control method	Trailing edge dimming
Short-circuit protected	Yes
Ambient temperature	-20 - 45°C
Driver lifetime	50000h
DIN-rail mounting	No
Brand	eldoLED
Dimmable	Yes
Emergency power supply system	Central (central battery)
Control type	Constant current
Warranty	5 years









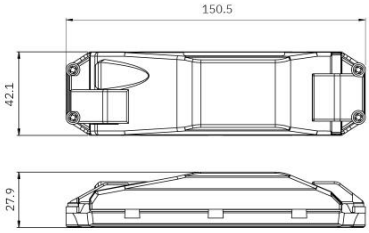

17.11.2026 - Disclaimer: information subject to change.