TRONIX guided by light

Emergency downlight | 3W | Ø140mm | white | auto test

ARTICLE NUMBER: 600-025

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

Versatile recessed or surface-mounted emergency lighting fixture with automatic self-test and interchangeable lens (oval/round). Suitable for escape routes and open areas. Includes integrated driver and battery.

Key product features

- **Mounting method:** Surface-mounted/recessed
- **Max. system power (W):** 3
- **Housing colour:** White
- **Luminous flux in emergency mode (lm):** 240
- **Function:** Escape route lighting
- **Emergency function monitoring system:** Automatic self-diagnosis

Technical specifications:

Product Name	Emergency downlight | 3W | Ø140mm | white | auto test
Ean	8714984935280
Outer box qty	30st
Housing material	Plastic
Lamp type	LED not exchangeable
Housing colour	White
Material cover	Plastic, transparent
Voltage type	AC
Nominal current	80 - 80mA
Type of control gear	LED operating device current-controlled
Battery technology	Lithium-ion
Mounting method	Surface mounting/recessed mounting
Degree of protection (IP)	IP20
Outer diameter	140mm
Nominal voltage	200 - 240V


Built-in height	55.34mm
Built-in height/depth	55.34mm
Height	61.55mm
Height/depth	61.55mm
Built-in diameter	112.5mm
Colour temperature	5000 - 5000K
Exchangeable control gear	No
Function	Escape route lighting
With pictogram	No
Suitable for standby switching	Yes
Suitable for continuous circuit	No
Impact strength	IK00
RAL-number housing	9016
Connection type	Plug-in connection
Light distributor	Focal lens
Luminous flux in standby mode	240lm
Nominal operation time	3 - 3h
Max. system power	3W
Power factor	0.3
Type of wiring	Ending
Number of poles	2
With heating element for battery	No
Type of lithium-ion battery	Lithium iron phosphate (LiFePO4)
Rated luminous flux according to IEC 62722-2- 1	240 - 240lm
Emergency power supply system	Peripheral (individual battery)
Emergency function monitoring system	Automatic self test


17.11.2026 - Disclaimer: information subject to change.

Luminous flux in emergency mode	240lm
Power consumption in emergency mode	1.7W
Connectable conductor cross section	0.75 - 2.5mm²
Warranty	5 years (battery 2 years)
Ambient temperature	1 - 45°C





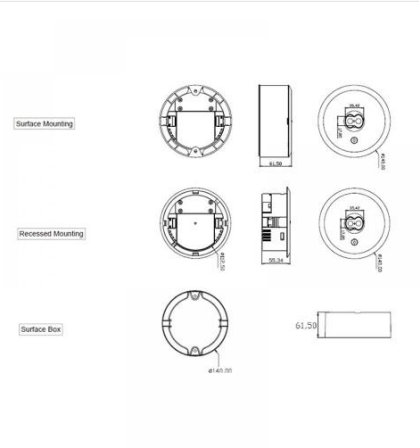

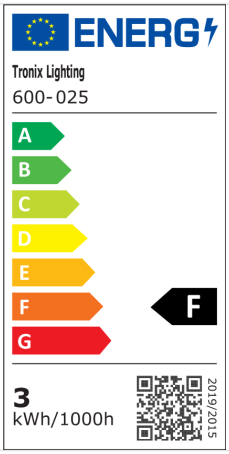

17.11.2026 - Disclaimer: information subject to change.