TRONIX guided by light

LED driver | NFC100-500mA | 10 watt | DALI dimmable

ARTICLE NUMBER: 215-273

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

CARE SHARE CONNECT

tronixlighting.com

This sturdy DALI LED driver is compact in size, making it easy to integrate this module into a new or existing lighting plan. This module works with a maximum output of 10 watts (100-500 mA), making this LED driver work well in combination with different light sources.

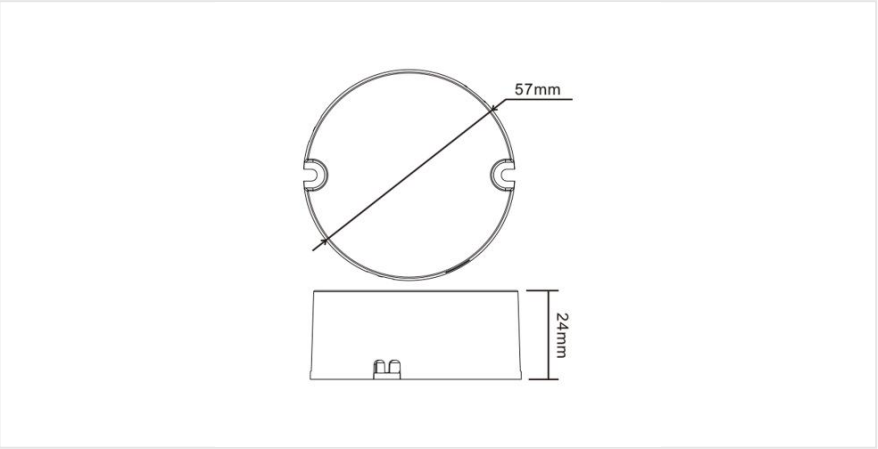
Features

- Compact size: Ø 57 mm diameter and 24 mm height
- Output voltage 3 - 42 Volt
- IP20 for indoor use (dry areas only)

Technical specifications:

Product Name	LED driver | NFC100-500mA | 10 watt | DALI dimmable
Ean	8714984948532
Outer box qty	100st
Housing	Plastic housing
Model	Static
Output voltage	10 - 42V
Output current	100 - 500mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	No
Output power	10 - 10W
Degree of protection (IP)	IP20
Height	24mm
Diameter	57mm
Power consumption	10W
Input voltage	220 - 240V
Frequency input voltage	0 - 60Hz
Overload protection	Yes
Overtemperature protection	Yes

Control method	DALI
Short-circuit protected	Yes
Ambient temperature	-25 - 60??C
Driver lifetime	100000h
Number of colour channels	1
DIN-rail mounting	No
Brand	Tronix Lighting
Dimmable	Yes
Emergency power supply system	None
Control type	Constant current
Warranty	5 years


57mm
24mm