TRONIX guided by light

# LED exit sign | wall mount | black | AT | incl. pictograms

ARTICLE NUMBER: 600-020

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

Compact LED emergency luminaire with automatic self-test, orientation lighting and interchangeable pictograms. Suitable for wall mounting or semi-recessed installation. Ideal for permanent escape route indication in professional environments.

### Key product features

- **Mounting method:** Surface/recessed
- **Max. system power (W):** 5
- **Housing colour:** Black
- **Type of indicator:** Single-sided
- **Recognition distance (m):** 25
- **Function:** Escape route lighting/indication
- **Emergency function monitoring system:** Automatic self-diagnosis

### Technical specifications:

| | |
|---|---|
| Product Name | LED exit sign \| wall mount \| black \| AT \| incl. pictograms |
| Ean | 8714984942332 |
| Outer box qty | 10st |
| Housing material | Plastic |
| Lamp type | LED not exchangeable |
| Housing colour | Black |
| Material cover | Plastic, transparent |
| Voltage type | AC |
| Nominal current | 50 - 50mA |
| Type of control gear | LED operating device current-controlled |
| Battery technology | Lithium-ion |
| Mounting method | Surface mounting/recessed mounting |
| Degree of protection (IP) | IP40 |
| Nominal voltage | 220 - 240V |

| | |
|---|---|
| Length | 330mm |
| Width | 190mm |
| Height | 45mm |
| Height/depth | 45mm |
| Colour temperature | 5000 - 5000K |
| Exchangeable control gear | No |
| Function | Escape route lighting/signage |
| With pictogram | Yes |
| Suitable for standby switching | Yes |
| Suitable for continuous circuit | Yes |
| Impact strength | IK07 |
| RAL-number housing | 9005 |
| Connection type | Plug-in connection |
| Light distributor | None |
| Rated lifetime L70/B50 at 25 ??C | 50000h |
| Luminous flux in standby mode | 35lm |
| Nominal operation time | 3 - 3h |
| Max. system power | 1W |
| Power factor | 0.3 |
| Type of wiring | Ending |
| Number of poles | 2 |
| With heating element for battery | No |
| Type of lithium-ion battery | Lithium iron phosphate (LiFePO4) |
| Rated luminous flux according to IEC 62722-2- 1 | 35 - 35lm |
| Emergency power supply system | Peripheral (individual battery) |
| Emergency function monitoring system | Automatic self test |


17.11.2026 - Disclaimer: information subject to change.


| | |
|---|---|
| Luminous flux in emergency mode | 50lm |
| Recognition distance | 25m |
| Power consumption in emergency mode | 1.5W |
| Type of indicator | Single-sided |
| Connectable conductor cross section | 0.75 - 2.5mm?? |
| Suitable for labelling type | Insert sheet/plate |
| Warranty | 5 years (battery 2 years) |
| Ambient temperature | 1 - 45??C |








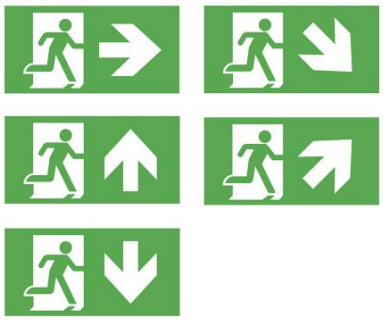

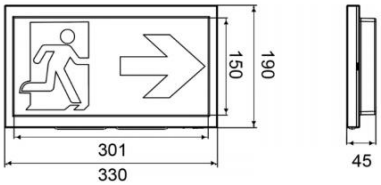

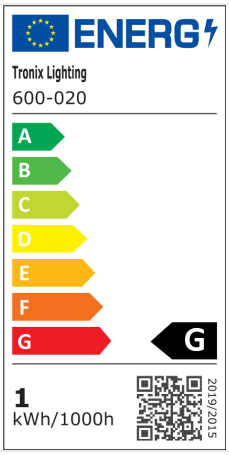
17.11.2026 - Disclaimer: information subject to change.