# LED panel | 30*120 | 36W | 3-CCT | UGR<19 | 2m cable EU plug

ARTICLE NUMBER: 173-053

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

Practical LED panel with 120 lm/W output, adjustable colour temperature and EU plug. Available with standard or UGR<19 optics. Ideal for a wide range of applications.

**Key product features:**

- **Colour temperature (K):** 3000 - 5700
- **Built-in height/depth (mm):** 25
- **Unified Glare Ratio (UGR):** 19
- **Connection type:** Plug
- **Luminaire efficacy (lm/W):** 104 - 112

**Technical specifications:**

| | |
|---|---|
| Product Name | LED panel \| 30*120 \| 36W \| 3-CCT \| UGR19 \| 2m cable EU plug |
| Ean | 8714984949119 |
| Outer box qty | 6st |
| Lamp type | LED not exchangeable |
| Housing material | Aluminium |
| Housing colour | White |
| Material cover | Plastic, opal |
| Suitable for emergency lighting | Yes |
| Nominal current | 152 - 152mA |
| Voltage type | AC |
| Type of control gear | LED operating device current-controlled |
| With control gear | Yes |
| Built-in length | 1195mm |
| Built-in width | 295mm |
| Constant light output (CLO) | No |
| Type of grid | None |
| Nominal voltage | 220 - 240V |

17.11.2026 - Disclaimer: information subject to change.


| | |
|---|---|
| Length | 1195mm |
| Width | 295mm |
| Height/depth | 25mm |
| Colour of light | White |
| Colour rendering index CRI | 80-89 |
| Exchangeable control gear | No |
| Dimming 0-10 V | No |
| Dimming 1-10 V | No |
| Dimming DALI | No |
| Dimming phase cut-off (trailing edge) | No |
| With movement sensor | No |
| With presence detector | No |
| Impact strength | IK02 |
| With light sensor | No |
| Suitable for surface mounting | Yes |
| Suitable for built-in mounting | Yes |
| Light distribution | Symmetric |
| Beam angle | > 80?? - Extreme wide beam |
| Light outlet | Indirect |
| Dimming RF | No |
| Dimming Zigbee | No |
| Light distributor | Diffuser lens/optic/panel |
| Surface protection housing | Lacquered |
| Colour consistency (McAdam ellipse) | SDCM3 |
| Rated lifetime L70/B50 at 25 ??C | 60000h |
| Colour of light adjustable | Positions |
| Luminous flux adjustable | No |


17.11.2026 - Disclaimer: information subject to change.

| | |
|---|---|
| Max. system power | 36W |
| Beam angle adjustable | No |
| Power factor | 0.98 |
| Type of wiring | Ending |
| Number of poles | 2 |
| Built-in height/depth | 25mm |
| Compatible with Casambi | No |
| Luminaire efficacy | 100 - 100lm/W |
| Dimmable | No |
| Rated luminous flux according to IEC 62722-2- 1 | 3600 - 3600lm |
| Emergency power supply system | None |
| Emergency function monitoring system | None |
| Suitable for ceiling mounting | Yes |
| Connectable conductor cross section | 0.75 - 0.75mm?? |
| Suitable for wall mounting | Yes |
| Suitable for suspended mounting | Yes |
| Suitable for workplace according to EN 12464-1 | No |
| Degree of protection (IP), rear side | IP20 |
| Degree of protection (IP), front side | IP20 |
| With mounting material | Yes |
| Size | 30x120 cm |
| Colour temperature | 3000 - 4000 - 5700K |
| With connection cord and plug | Yes |
| Length of power cord | 2000mm |
| Connection type | EU plug |

17.11.2026 - Disclaimer: information subject to change.

| | |
|---|---|
| Dimming method | Non-dimmable |
| Warranty | 5 years |
| Ambient temperature | -20 - 40??C |
| Connection cable length | 2000m |

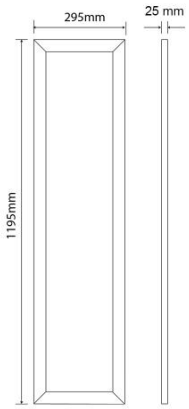

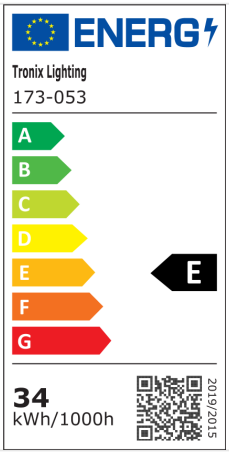
17.11.2026 - Disclaimer: information subject to change.