
TRONIX guided by light

LED panel || narrow frame | 30*120cm | tuneable white | UGR<

ARTICLE NUMBER: 174-256

View this product in our webshop

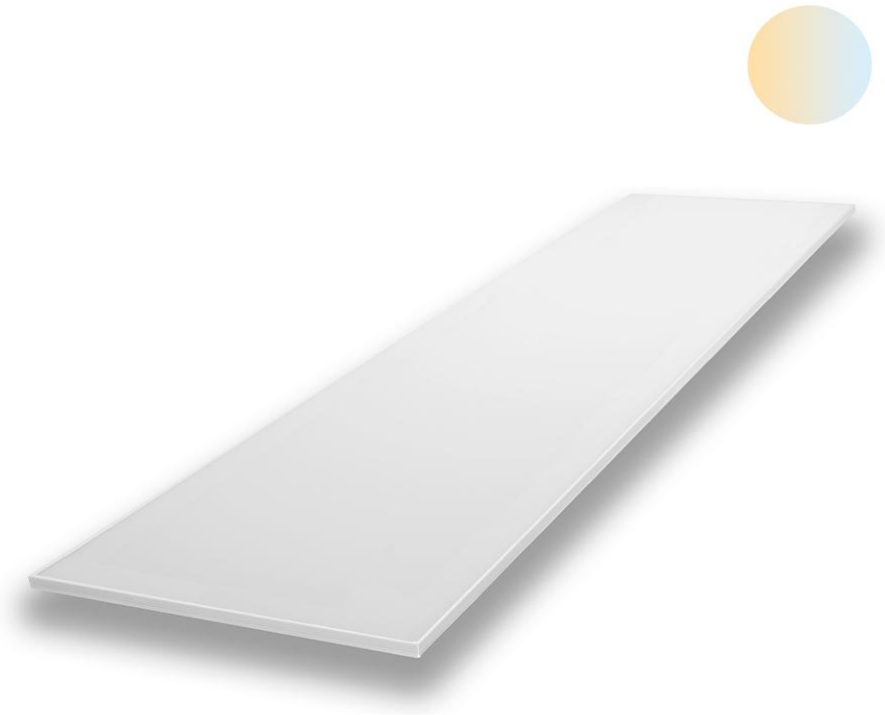

17.11.2026 - Disclaimer: information subject to change.

Create a natural course of light in your building with Tronix tuneable white LED panels, that are completely adjustable in both light intensity and color tone. With the matching controller, not only the amount of light is completely adjustable, but on top of that it is possible to choose from a complete color range, varying from 2700K (warm light) to 6000K (cold light). With these special panels you can create a more natural course of light: from dimmed warm light in the morning, to a higher intensity with cooler light around noon, and then slowly getting back again to a lower light level with warm white light.

Features

- High light efficiency of >100 Lm/W
- 5 year warranty
- Narrow frame 4mm
- UGR<19 value for minimal discomfort from glare and high productivity
- Driver and desk remote not included (see related products)

Technical specifications:

Product Name	LED panel || narrow frame | 30*120cm | tuneable white | UGR
Ean	8714984938311
Outer box qty	4st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	White
Material cover	Other
Suitable for emergency lighting	Yes
Nominal current	1050 - 1050mA
Voltage type	AC
Type of control gear	LED operating device current-controlled

17.11.2026 - Disclaimer: information subject to change.

With control gear	No
Built-in length	1195mm
Built-in width	295mm
Constant light output (CLO)	No
Type of grid	None
Nominal voltage	34.3 - 34.3V
Length	1195mm
Width	295mm
Height/depth	11mm
Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	No
Dimming 0-10 V	Yes
Dimming 1-10 V	Yes
Dimming DALI	Yes
Dimming phase cut-off (trailing edge)	Yes
With movement sensor	No
With presence detector	No
Impact strength	IK02
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	Yes
Light distribution	Symmetric
Beam angle	> 80?? - Extreme wide beam
Light outlet	Indirect
Dimming RF	Yes
Dimming Zigbee	Yes


17.11.2026 - Disclaimer: information subject to change.

Light distributor	Diffuser lens/optic/panel
Surface protection housing	Lacquered
Colour consistency (McAdam ellipse)	SDCM6
Rated lifetime L70/B50 at 25 ??C	83000h
Colour of light adjustable	Continuously variable
Luminous flux adjustable	Continuously variable
Max. system power	36W
Beam angle adjustable	No
Power factor	0.9
Type of wiring	Ending
Number of poles	2
Built-in height/depth	11mm
Compatible with Casambi	No
Luminaire efficacy	100 - 100lm/W
Dimmable	Yes
Rated luminous flux according to IEC 62722-2- 1	3600 - 3600lm
Emergency power supply system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 0.75mm??
Suitable for wall mounting	Yes
Suitable for suspended mounting	Yes
Suitable for workplace according to EN 12464-1	Yes
Degree of protection (IP), rear side	IP20
With mounting material	Yes
Size	30x120 cm
Colour temperature	Tuneable White

17.11.2026 - Disclaimer: information subject to change.

With connection cord and plug	Yes
Length of power cord	2000mm
Connection type	EU plug
Dimming method	Optional
Warranty	5 years
Ambient temperature	-20 - 40??C
Connection cable length	2000m



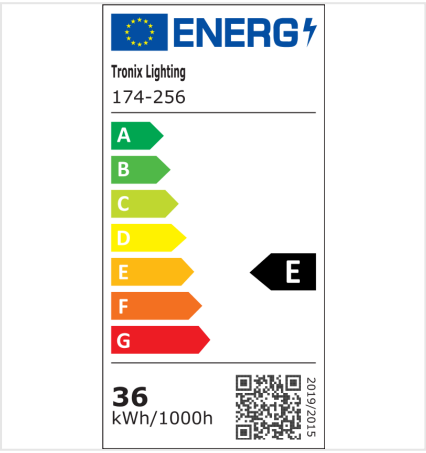

17.11.2026 - Disclaimer: information subject to change.