
TRONIX guided by light

LED panel | reflector | 60*60 | 3-CCT | black | GST18i3

ARTICLE NUMBER: 173-065

View this product in our webshop

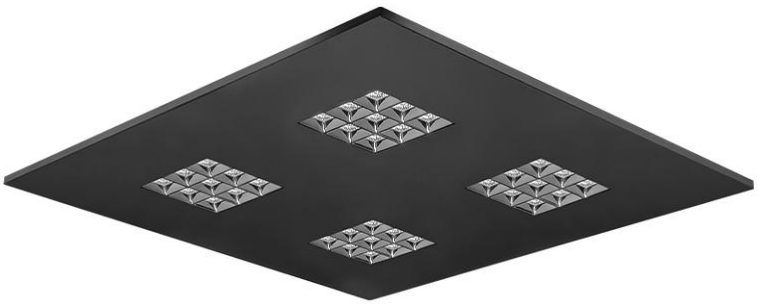

17.11.2026 - Disclaimer: information subject to change.

This versatile LED panel provides optimal light comfort with integrated reflectors for smooth, uniform light output. Ideal for various work and living environments.

Key product features:

- **Colour temperature (K):** 3000 - 5700
- **Housing colour:** Black
- **Connection type:** Plug
- **Light distributor:** Reflector
- **Unified Glare Ratio (UGR):** 17
- **Luminaire efficacy (lm/W):** 139 - 155

Technical specifications:

Product Name	LED panel | reflector | 60*60 | 3-CCT | black | GST18i3
Ean	8714984950764
Outer box qty	5st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	Black
Material cover	Other
Suitable for emergency lighting	Yes
Nominal current	112 - 112mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Built-in length	595mm
Built-in width	595mm
Constant light output (CLO)	No
Type of grid	None

17.11.2026 - Disclaimer: information subject to change.

Nominal voltage	220 - 240V
Length	595mm
Width	595mm
Height/depth	12mm
Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	No
With presence detector	No
Impact strength	IK02
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	Yes
Light distribution	Symmetric
Beam angle	> 80?? - Extreme wide beam
Light outlet	Direct/indirect
Dimming RF	No
Dimming Zigbee	No
Light distributor	Reflector
Surface protection housing	Powder coating
Colour consistency (McAdam ellipse)	SDCM6
Rated lifetime L70/B50 at 25 ??C	50000h
Colour of light adjustable	Positions

17.11.2026 - Disclaimer: information subject to change.


Luminous flux adjustable	No
Max. system power	26W
Beam angle adjustable	No
Power factor	0.93
Type of wiring	Ending
Number of poles	2
Built-in height/depth	12mm
Compatible with Casambi	No
Luminaire efficacy	150 - 150lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2- 1	3750 - 3750lm
Emergency power supply system	None
Emergency function monitoring system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 0.75mm??
Suitable for wall mounting	Yes
Suitable for suspended mounting	Yes
Suitable for workplace according to EN 12464-1	Yes
Degree of protection (IP), rear side	IP20
Degree of protection (IP), front side	IP20
With mounting material	Yes
Size	60x60 cm
Colour temperature	3000 - 4000 - 5700K
With connection cord and plug	Yes
Length of power cord	300mm


17.11.2026 - Disclaimer: information subject to change.

Connection type	GST18i3
Dimming method	Non-dimmable
Warranty	5 years
Ambient temperature	-20 - 45??C
Connection cable length	300m





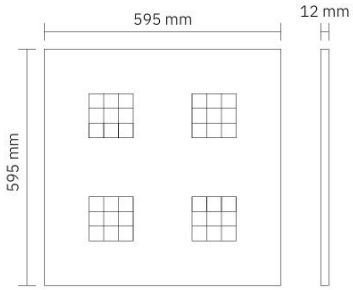

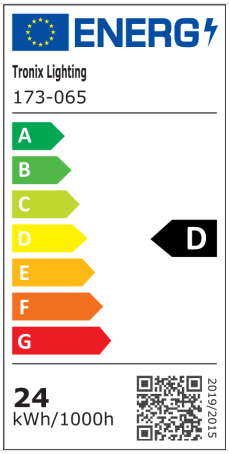

17.11.2026 - Disclaimer: information subject to change.