# LED ropelight | 230V | 51m | vertical | 2400K WW+

ARTICLE NUMBER: 055-010

View this product in our webshop

100% matching colors with proSYSTEM



17.11.2026 - Disclaimer: information subject to change.

230V LED rope lights from Tronix Lighting are hugely popular due to their versatility and durability, allowing them to be used year-round. Light ropes are ideal for lighting locations both indoors and outdoors. Think of terraces, cafes, swimming pools or as accent lighting at a bar.

**Features**

- IP65
- Vertical LED structure
- 36 DIP LEDs per meter
- Clippable per 150 cm rope light
- Including power cable (ungrounded schuko plug)

**Technical specifications:**


| | |
|---|---|
| Product Name | LED ropelight \| 230V \| 51m \| vertical \| 2400K WW+ |
| Ean | 8714984931183 |
| Outer box qty | 1st |
| Model | Hose |
| Lamp type | LED not exchangeable |
| Lamp voltage | 0 - 230V |
| Number of nodes per meter | 36 |
| Lamp power per meter | 3.2W |
| Beam angle | 360° |
| Voltage type | AC |
| Type of control gear | Not required |
| Input voltage tracklights | 230V |
| With protective cover | No |
| Length of particular segments | 1500mm |
| Degree of protection (IP) | IP65 |
| Self-adhesive | No |

17.11.2026 - Disclaimer: information subject to change.

| | |
|---|---|
| Luminous flux per meter | 100lm |
| Total length | 51m |
| Colour of light | White |
| Suitable for dimmer | Yes |
| Colour rendering index CRI | 70-79 |
| Diameter | 13mm |
| Exchangeable control gear | No |
| Connection type | Other |
| Rated lifetime L70/B50 at 25 °C | 20000h |
| Colour of light adjustable | No |
| Luminous flux per foot | 30.48lm |
| Luminous flux adjustable | Continuously variable |
| Max. system power | 163.2W |
| Beam angle adjustable | No |
| Luminaire efficacy | 31.3lm/W |
| Power factor | 0.95 |
| Type of wiring | Ending |
| Number of poles | 2 |
| Type of power supply | Mains power supply |
| Connectable conductor cross section | 0.75 - 0.75mm² |
| Colour temperature | 2400K |
| Warranty | 2 years |
| Ambient temperature | -20 - 50°C |
| Lowest bending radius | 100mm |
| Connection cable length | 1.5m |

17.11.2026 - Disclaimer: information subject to change.



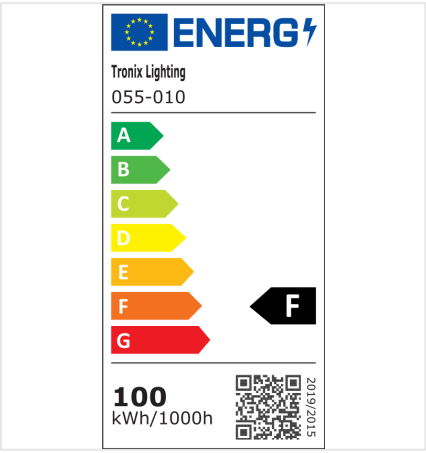


17.11.2026 - Disclaimer: information subject to change.