LED spot || universal | 700mA | 2,5W | high lumen | 2700K

ARTICLE NUMBER: 148-139

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

Tronix modules are equipped with a Plug&Play connector. The connector is easy to connect to a module-extension cable (up to 10 meters), a module-divider (up to 6 pieces), or directly to a Tronix driver. This makes even the most complicated lighting plans easy to realize!

Specifications

- Excellent color rendering CRI >90
- Perfectly compatible with protocols> DALI, Casambi, Triac, 1-10V
- Good heat dissipation and long lifespan
- High quality aluminum with powder coating, or aluminum anodized

Universal module: Can be combined with regular 50 mm plates for easy installation.


Technical specifications:


Product Name	LED spot || universal | 700mA | 2,5W | high lumen | 2700K
Ean	8714984911314
Colour	White
Housing colour	Aluminium
Connection type	Other
Height	24mm
Diameter	50mm
Lamp power	2.5 - 2.5W
Colour temperature	2700K
Beam angle	40 - 40??
Voltage type	DC
Operating voltage	3.6 - 3.6V
Operating current	700 - 700mA
Suitable for constant voltage	No
Suitable for constant current	Yes

17.11.2026 - Disclaimer: information subject to change.

Average nominal lifetime	30000h
Degree of protection (IP)	IP44
Luminous flux	182 - 182lm
Specific luminous efficacy	72.8 - 72.8lm/W
Number of LEDs	1
External driver required	Yes
Warranty	3 years

17.11.2026 - Disclaimer: information subject to change.

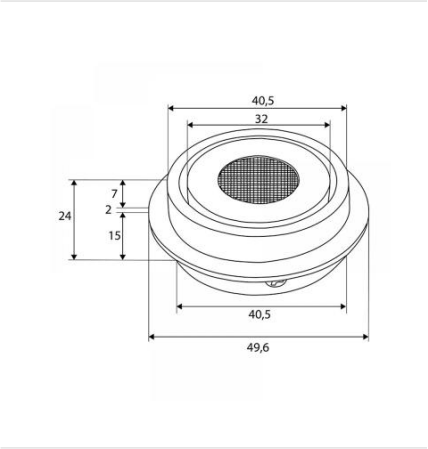

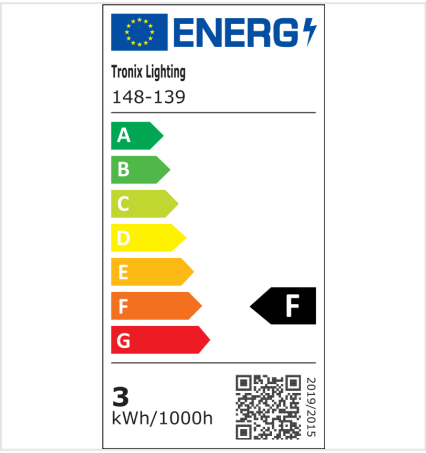

17.11.2026 - Disclaimer: information subject to change.