TRONIX guided by light

LED strip || 24V | 60LED/m 5050 | 5m | IP52 | RGB

ARTICLE NUMBER: 127-010

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

Powerful 24V RGB LED strip with 5050 LEDs. Designed for dynamic colour lighting with smooth transitions, suitable for DMX, RGB and DALI control.

Key product features:

- **Number of light sources per metre:** 60
- **Lamp power per metre (W):** 14.4
- **Width (mm):** 10
- **Length of single sections (mm):** 100
- **Degree of protection (IP):** IP52
- **Luminous flux per metre (Lm):** 620
- **Light colour:** RGB

Technical specifications:


Product Name	LED strip || 24V | 60LED/m 5050 | 5m | IP52 | RGB
Ean	8714984908482
Outer box qty	25st
Model	Strip
Lamp type	LED not exchangeable
Lamp voltage	0 - 24V
Number of nodes per meter	60
Lamp power per meter	14.4W
Beam angle	120°
Voltage type	DC
Type of control gear	LED operating device voltage-controlled
Input voltage tracklights	24V
With protective cover	Yes
Length of particular segments	100mm
Degree of protection (IP)	IP52
Self-adhesive	Yes


17.11.2026 - Disclaimer: information subject to change.

Luminous flux per meter	621lm
Total length	5m
Width	10mm
Height/depth	2.3mm
Colour of light	RGB
Suitable for dimmer	Yes
Exchangeable control gear	Yes
Connection type	Other
Rated lifetime L70/B50 at 25 °C	54000h
Colour of light adjustable	Continuously variable
Luminous flux per foot	189.28lm
Luminous flux adjustable	Continuously variable
LED type	SMD
Max. system power	72W
Beam angle adjustable	No
Luminaire efficacy	42lm/W
Power factor	1
Type of wiring	Loop-through wiring included
Number of poles	4
Connectable conductor cross section	0.5 - 2.5mm²
Colour temperature	RGB
Warranty	3 years
Ambient temperature	-20 - 50°C
Lowest bending radius	50mm

17.11.2026 - Disclaimer: information subject to change.



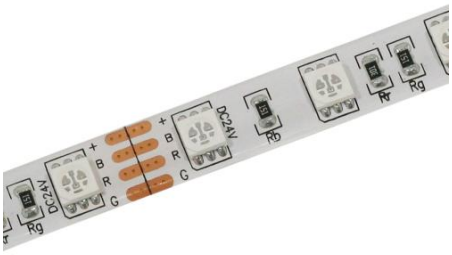

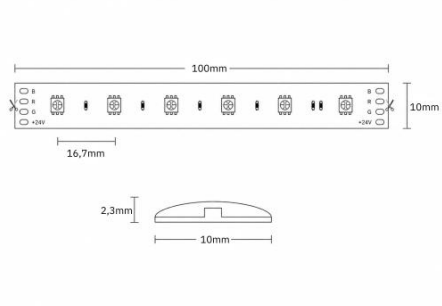

17.11.2026 - Disclaimer: information subject to change.