# LED strip CC || 60LED/m 2835 | 20m | IP20 | 3000K | CRI>90

ARTICLE NUMBER: 127-111

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

Constant current single color LED strip for indoor use. For lengths up to 20 meter with a special technology for an equal distribution of light output.
With 3M adhesive tape on the back for easy installation.

**Features**

- 6 LEDs = 100 mm
- IP20 for indoor use
- High color rendering index CRI>90
- Constant color temperature MacAdam: <3
- Long lifespan of 54.000 hours (L70)
- Double layer PCB for good heat dissipation

**Technical specifications:**


| | |
|---|---|
| Product Name | LED strip CC \|\| 60LED/m 2835 \| 20m \| IP20 \| 3000K \| CRI>90 |
| Ean | 8714984920606 |
| Outer box qty | 25st |
| Model | Strip |
| Lamp type | LED not exchangeable |
| Lamp voltage | 0 - 24V |
| Number of nodes per meter | 60 |
| Lamp power per meter | 8.5W |
| Beam angle | 120° |
| Voltage type | DC |
| Type of control gear | LED operating device voltage-controlled |
| Input voltage tracklights | 24V |
| With protective cover | No |
| Length of particular segments | 100mm |
| Degree of protection (IP) | IP20 |
| Self-adhesive | Yes |


17.11.2026 - Disclaimer: information subject to change.

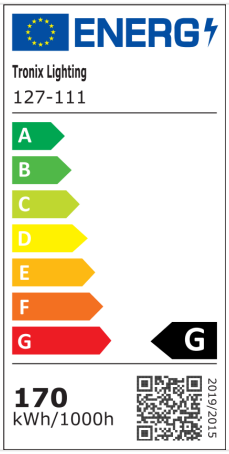
| | |
|---|---|
| Luminous flux per meter | 780lm |
| Total length | 20m |
| Width | 12mm |
| Height/depth | 1.2mm |
| Colour of light | White |
| Suitable for dimmer | Yes |
| Colour rendering index CRI | 90-100 |
| Exchangeable control gear | Yes |
| Connection type | Other |
| Rated lifetime L70/B50 at 25 °C | 54000h |
| Colour of light adjustable | No |
| Luminous flux per foot | 237.74lm |
| Luminous flux adjustable | Continuously variable |
| LED type | SMD |
| Max. system power | 170W |
| Beam angle adjustable | No |
| Luminaire efficacy | 91.8lm/W |
| Power factor | 1 |
| Type of wiring | Loop-through wiring included |
| Number of poles | 2 |
| Connectable conductor cross section | 0.5 - 2.5mm² |
| Colour temperature | 3000K |
| Warranty | 3 years |
| Ambient temperature | -20 - 50°C |
| Lowest bending radius | 50mm |

17.11.2026 - Disclaimer: information subject to change.






17.11.2026 - Disclaimer: information subject to change.