TRONIX guided by light

LED strip | COB 576LED/m | 15W/m | IP20 | TW 2200~6000K

ARTICLE NUMBER: 127-129

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

CARE SHARE CONNECT

tronixlighting.com

COB Tunable White LED strip with adjustable white from 2200K to 6000K. Seamless light line, 27.8 mm cutting section, ideal for professional indoor lighting.

Key product features:

- **Beam angle (°):** 180
- **Lamp power per meter (W):** 15
- **Colour temperature (K):** 2200 - 6000
- **Width (mm):** 10
- **Length of particular sections (mm):** 27.8
- **Degree of protection (IP):** IP20
- **Luminous flux per meter (lm):** 1525

Technical specifications:

Product Name	LED strip | COB 576LED/m | 15W/m | IP20 | TW 2200~6000K
Ean	8714984940062
Outer box qty	25st
Model	Strip
Lamp type	LED not exchangeable
Lamp voltage	0 - 24V
Number of nodes per meter	576
Lamp power per meter	15W
Beam angle	180°
Voltage type	DC
Type of control gear	LED operating device voltage-controlled
Input voltage tracklights	24V
With protective cover	No
Length of particular segments	27.8mm
Degree of protection (IP)	IP20

Self-adhesive	Yes
Luminous flux per meter	1340lm
Total length	5m
Width	10mm
Height/depth	2mm
Colour of light	White
Suitable for dimmer	Yes
Colour rendering index CRI	90-100
Exchangeable control gear	Yes
Connection type	Other
Rated lifetime L70/B50 at 25 °C	54000h
Colour of light adjustable	Continuously variable
Luminous flux per foot	408.43lm
Luminous flux adjustable	Continuously variable
LED type	COB
Max. system power	75W
Beam angle adjustable	No
Luminaire efficacy	80lm/W
Power factor	1
Type of wiring	Loop-through wiring included
Number of poles	3
Connectable conductor cross section	0.5 - 2.5mm²
Colour temperature	Tuneable White
Warranty	3 years
Ambient temperature	-20 - 50°C
Lowest bending radius	10mm


17.11.2026 - Disclaimer: information subject to change.









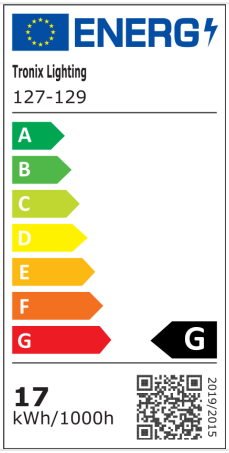

17.11.2026 - Disclaimer: information subject to change.