TRONIX guided by light

Meanwell | HDR-30-24 | 24V | 30W | DIN

ARTICLE NUMBER: 215-550

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

This Mean Well DIN-rail power supply from the HDR series is a compact and reliable solution for powering DC applications within control cabinets and installations. Suitable for professional applications in automation and lighting.

Key product features

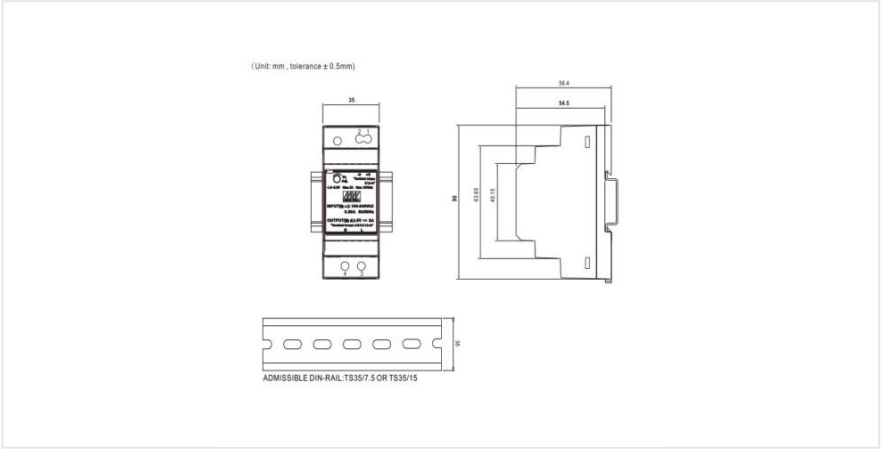
- **Suitable for constant voltage:** Yes
- **Output voltage (V):** 24
- **Output power (W):** 0–36
- **DIN-rail mounting:** Yes
- **Input voltage (V):** 85–264

Technical specifications:

Product Name	Meanwell | HDR-30-24 | 24V | 30W | DIN
Ean	8714984955172
Outer box qty	1st
Housing	Plastic housing
Model	Static
Output voltage	24 - 24V
Output current	0 - 1.5mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	Yes
Output power	0 - 36W
Degree of protection (IP)	IP20
Length	90mm
Width	35mm
Height	58.4mm
Power consumption	36W
Input voltage	85 - 264V

17.11.2026 - Disclaimer: information subject to change.

Frequency input voltage	47 - 63Hz
Overload protection	Yes
Overtemperature protection	No
Control method	Non-dimmable
Short-circuit protected	Yes
Ambient temperature	-30 - 70??C
Driver lifetime	100000h
Number of colour channels	1
DIN-rail mounting	Yes
Brand	Meanwell
Dimmable	No
Emergency power supply system	None
Control type	Constant voltage
Warranty	5 years


(Unit: mm , tolerance ± 0.5mm)
35
58.4
54.5
90
43.65
45.15
35
ADMISSIBLE DIN-RAIL:TS35/7.5 OR TS35/15