TRONIX guided by light

Power supply | 24V | 25W | trailing edge | indoor

ARTICLE NUMBER: 215-404

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

This sturdy LED driver has a maximum output of 25W and 24V and is extremely well suited for use with various light sources. The technologies present provide a smooth, stepless dimming experience from 1 - 100%.

Features


- Dimmable on phase cut-off and cut-on
- Output power 100 ~ 1040 mA
- Compact size 122*52*30 mm

Technical specifications:

Product Name	Power supply | 24V | 25W | trailing edge | indoor
Ean	8714984920255
Outer box qty	100st
Housing	Plastic housing
Model	Static
Output voltage	24 - 24V
Output current	100 - 1040mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	No
Output power	0 - 25W
Degree of protection (IP)	IP20
Length	122mm
Width	52mm
Height	30mm
Power consumption	25W
Input voltage	220 - 240V
Frequency input voltage	50 - 60Hz
Overload protection	Yes
Overtemperature protection	Yes

17.11.2026 - Disclaimer: information subject to change.

Control method	Trailing edge dimming
Short-circuit protected	Yes
Ambient temperature	-20 - 50??C
Driver lifetime	30000h
DIN-rail mounting	No
Brand	Tronix Lighting
Dimmable	Yes
Emergency power supply system	None
Control type	Constant voltage
Warranty	5 years
Suitable for DIN rail (top hat rail) mounting	No
Interface Pulse Width Modulation (PWM)	No

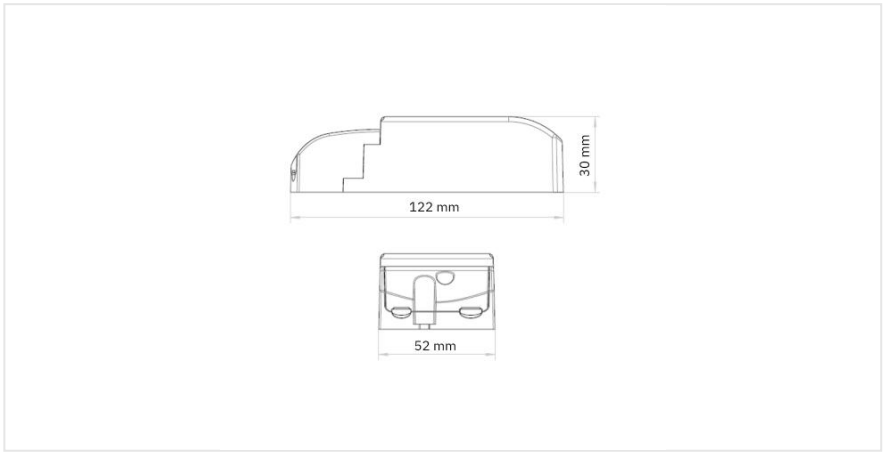

17.11.2026 - Disclaimer: information subject to change.