
# RF | controller | SC | 100-240V trailing edge | recessed

ARTICLE NUMBER: 213-025

View this product in our webshop

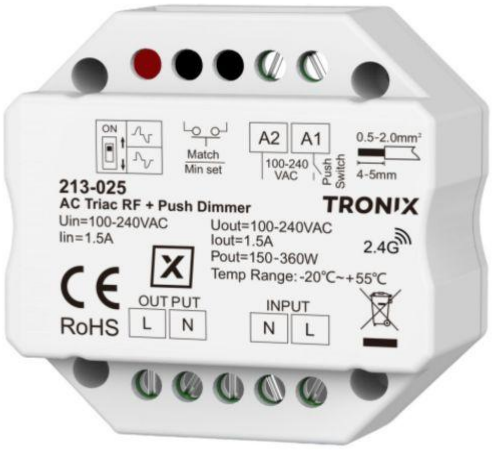


17.11.2026 - Disclaimer: information subject to change.

This RF and push-dim AC trailing edge dimmer enables both wireless and wired dimming of 230V light sources. Compact, versatile and suitable for both renovation and new-build projects.

**Key product features**


- **Control method:** RF
- **Number of colour channels:** 1
- **Output voltage (V):** 100 – 240
- **Input voltage (V):** 100 – 240
- **Max. output current (A):** 1.5
- **Suitable for flush mounting:** Yes

**Technical specifications:**

| | |
|---|---|
| Product Name | RF \| controller \| SC \| 100-240V trailing edge \| recessed |
| Ean | 8714984956216 |
| Outer box qty | 1st |
| Colour | White |
| Connection type | Screwed terminal |
| Operating method | Radio frequency (RF) |
| Control method | RF |
| Mounting method | Built-in |
| Material | Plastic |
| Material quality | Thermoplastic |
| Applicable with presence indicator | Yes |
| Suitable for degree of protection (IP) | IP20 |
| Applicable with movement sensor | Yes |
| Applicable with button | Yes |
| Applicable with transmission button | Yes |
| Applicable with time switch/timer | Yes |

| | |
|---|---|
| Nominal voltage | 100 - 240V |
| Control voltage | 100 - 240V |
| Min. depth of built-in installation box | 28mm |
| Min. brightness controllable | Yes |
| Max. switching power LED | 200W |
| Light value memory | Yes |
| Halogen free | Yes |
| RAL-number (similar) | 9016 |
| Core cross section | 0.75 - 2.5mm?? |
| Warranty | 5 years |

17.11.2026 - Disclaimer: information subject to change.

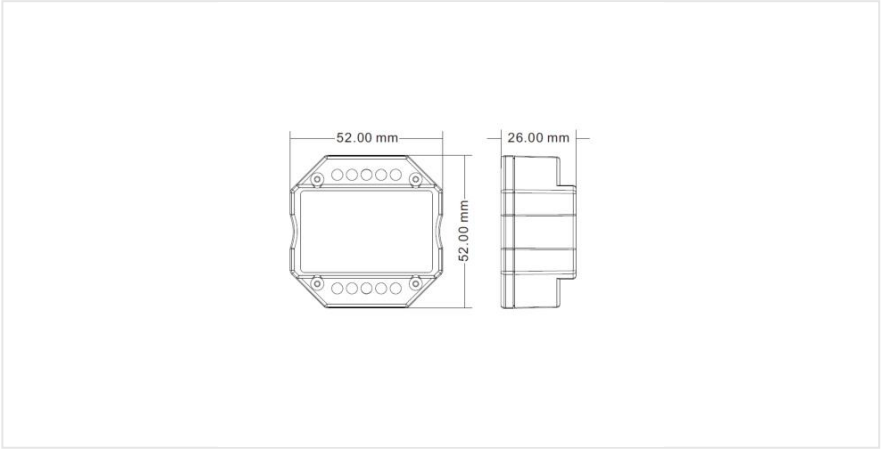
52.00 mm
26.00 mm
52.00 mm