RF | controller | SC/TW/RGB(W) | 12~48V | DIN

ARTICLE NUMBER: 213-019

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

RF LED controller with digital display and selectable modes for SC, TW, RGB, RGBW or 4-channel dimming applications. Suitable for 12–48 V DC systems, with adjustable PWM frequency and smooth, flicker-free dimming curve.

Key product features

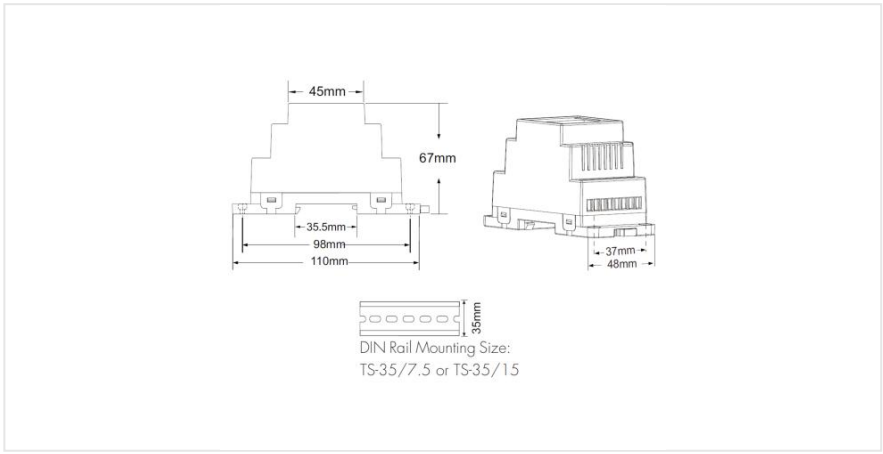
- **Type of control:** RF
- **Number of colour channels:** 4
- **Output voltage (V):** 12 – 48
- **Input voltage (V):** 12 – 48
- **Max. output current (A):** 20
- **Control type:** Constant voltage

Technical specifications:

Product Name	RF | controller | SC/TW/RGB(W) | 12~48V | DIN
Ean	8714984953048
Outer box qty	1st
Model	Dynamic
Housing	Plastic housing
Programmable	No
Max. output current	20A
Output voltage	12 - 48V
Suitable for outdoor use	No
Degree of protection (IP)	IP20
Length	110mm
Width	48mm
Height	67mm
Number of zones	1

17.11.2026 - Disclaimer: information subject to change.

Number of colour channels	4, RGBW
Suitable for surface mounting	No
Suitable for built-in mounting	Yes
Input voltage	12 - 48V
Control method	RF
DIN-rail mounting	Yes
Brand	Tronix Lighting
Compatible with Casambi	No
Control type	Constant voltage
Warranty	5 years


45mm
67mm
35.5mm
98mm
110mm
37mm
48mm
35mm
DIN Rail Mounting Size:
TS-35/7.5 or TS-35/15