
TRONIX guided by light

RF | controller | SC/TW/RGB(W) | 12~48V | IP67

ARTICLE NUMBER: 213-021

View this product in our webshop

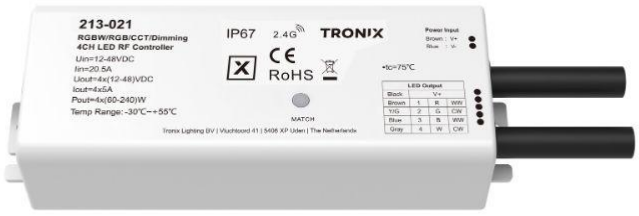

17.11.2026 - Disclaimer: information subject to change.

Waterproof RF LED controller for 12–48??V applications. Supports SC, TW, RGB and RGBW LED strips with flicker-free dimming curve, adjustable PWM frequency and automatic signal transmission up to 30 metres.

Key product features


- **Control type:** RF
- **Number of colour channels:** 4
- **Output voltage (V):** 12 – 48
- **Input voltage (V):** 12 – 48
- **Max. output current (A):** 20
- **Type of control:** Constant voltage

Technical specifications:

Product Name	RF | controller | SC/TW/RGB(W) | 12~48V | IP67
Ean	8714984953062
Outer box qty	1st
Model	Dynamic
Housing	Plastic housing
Programmable	No
Max. output current	20A
Output voltage	12 - 48V
Suitable for outdoor use	Yes
Degree of protection (IP)	IP67
Length	153mm
Width	57mm
Height	34mm
Number of zones	1
Number of colour channels	4, RGBW

17.11.2026 - Disclaimer: information subject to change.

Suitable for surface mounting	Yes
Suitable for built-in mounting	Yes
Input voltage	12 - 48V
Control method	RF
DIN-rail mounting	No
Brand	Tronix Lighting
Compatible with Casambi	No
Control type	Constant voltage
Warranty	5 years

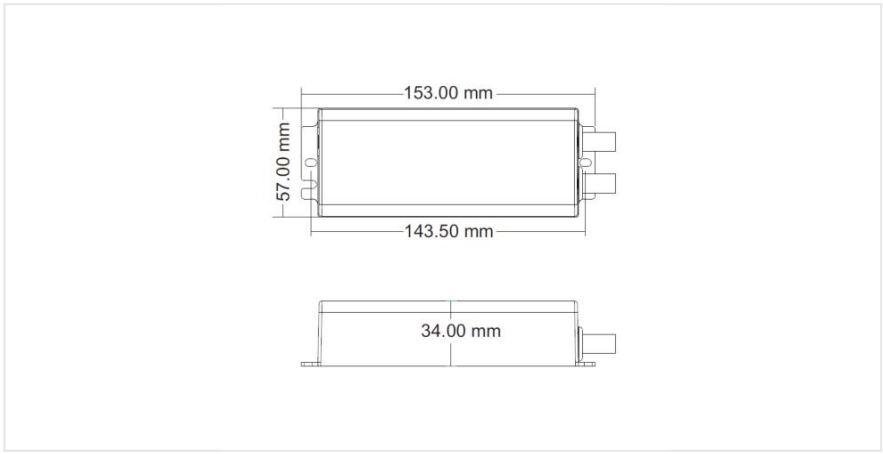

17.11.2026 - Disclaimer: information subject to change.