TRONIX guided by light

RF to 0-10V/PWM dimming module || 20mA output

ARTICLE NUMBER: 214-179

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

RF receiver with 0–10V, 0–5V or 0–15V dimming outputs and 230V relay (max. 5 A). Operates on 100–240V AC and includes PUSH DIM support for local control.

Key product features


- **Type of control:** RF
- **Number of colour channels:** 1
- **Output voltage (V):** 0 – 15
- **Input voltage (V):** 100 – 240
- **Max. output current (A):** 0.02

Technical specifications:

Product Name	RF to 0-10V/PWM dimming module || 20mA output
Ean	8714984941175
Outer box qty	64st
Model	Dynamic
Housing	Plastic housing
Programmable	No
Max. output current	20A
Output voltage	0 - 15V
Suitable for outdoor use	No
Degree of protection (IP)	IP20
Length	170mm
Width	59mm
Height	29mm
Number of zones	1
Number of colour channels	1, Single Colour
Suitable for surface mounting	Yes

17.11.2026 - Disclaimer: information subject to change.

Suitable for built-in mounting	No
Input voltage	100 - 240V
Control method	RF
DIN-rail mounting	No
Brand	Tronix Lighting
Compatible with Casambi	No
Warranty	5 years

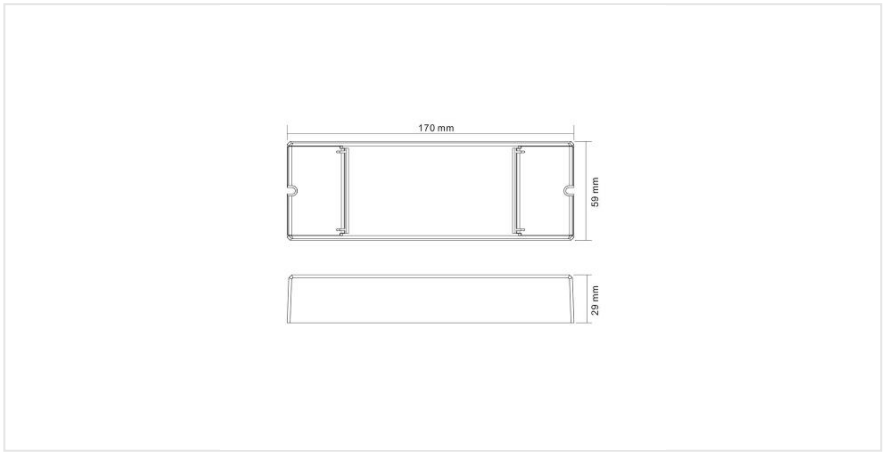

17.11.2026 - Disclaimer: information subject to change.