TRONIX guided by light

Sensor connect | controller | stairs | 24 steps

ARTICLE NUMBER: 213-552

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

Controller for stair step lighting with dual sensor input and integrated daylight sensor. Designed for dynamic stair lighting with automatic detection within the Easy Connect system.

Key product features

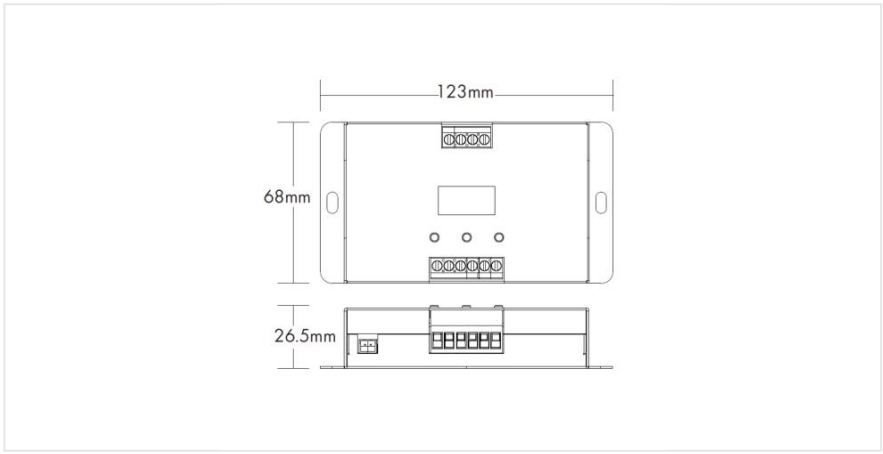
- **Type of control:** SPI
- **Number of colour channels:** 3
- **Output voltage (V):** 5 – 24
- **Input voltage (V):** 5 – 24
- **Max. output current (A):** 20
- **Type of control:** Voltage controlled

Technical specifications:

Product Name	Sensor connect | controller | stairs | 24 steps
Ean	8714984954144
Outer box qty	1st
Model	Dynamic
Housing	Metal housing
Programmable	Yes
Max. output current	20A
Output voltage	5 - 24V
Suitable for outdoor use	No
Degree of protection (IP)	IP20
Length	123mm
Width	68mm
Height	26.5mm
Number of zones	24
Number of colour channels	3, RGB

17.11.2026 - Disclaimer: information subject to change.

Suitable for surface mounting	Yes
Suitable for built-in mounting	Yes
Input voltage	5 - 24V
Control method	SPI
DIN-rail mounting	No
Brand	Tronix Lighting
Compatible with Casambi	No
Control type	Constant voltage
Warranty	5 years


123mm
68mm
26.5mm