Street light | 23/38/57/75W | 4000K

ARTICLE NUMBER: 220-053

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

LED street luminaire with adjustable power (23W–75W), high efficiency up to 153 lm/W and IP66 protection. Suitable for a wide range of outdoor environments thanks to its robust aluminium housing and impact-resistant design.

Key product features

- **Mounting method:** Post top/side entry
- **Degree of protection (IP):** IP66
- **Suitable for spigot size (mm):** 60
- **Impact strength:** IK09
- **Colour temperature (K):** 4000
- **Max. system power (W):** 60

Technical specifications:

Product Name	Street light | 23/38/57/75W | 4000K
Ean	8714984952089
Outer box qty	1st
Dimmable	No
Type	Streetlight
Lamp type	LED not exchangeable
Lamp holder	None
Housing colour	Aluminium
Housing material	Aluminium
Material cover	Glass transparent
Connection type	Push-in clamp
Mounting method	Post top/side entry
Length	681mm
Width	236mm

17.11.2026 - Disclaimer: information subject to change.


Height/depth	128mm
Colour of light	White
Colour consistency (McAdam ellipse)	SDCM3
Colour temperature	4000 - 4000K
Colour rendering index CRI	80-89
Voltage type	AC
Nominal voltage	120 - 277V
Nominal current	135 - 343mA
Suitable for lamp power	0 - 0W
Suitable for spigot size	60 - 60mm
Number of poles	3
Light source included	Yes, fixed LED
Light distributor	Focal lens
With connection cable	No
Connectable conductor cross section	0.75 - 2.5mm??
Type of control gear	LED operating device current-controlled
Exchangeable control gear	Yes
With control gear	Yes
Degree of protection (IP)	IP66
Surface protection	Powder coating
Impact strength	IK09
Rated lifetime L70/B50 at 25 ??C	131000h
Max. system power	75W
Rated luminous flux according to IEC 62722-2- 1	3700 - 11300lm
Luminaire efficacy	150lm/W
Power factor	0.97


17.11.2026 - Disclaimer: information subject to change.

Type of wiring	Ending
Warranty	5 years
Ambient temperature	-30 - 50??C





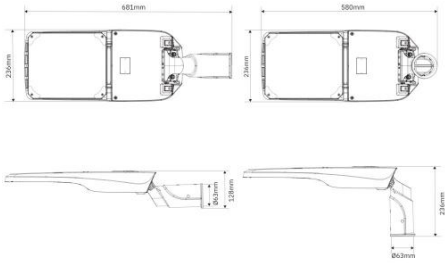

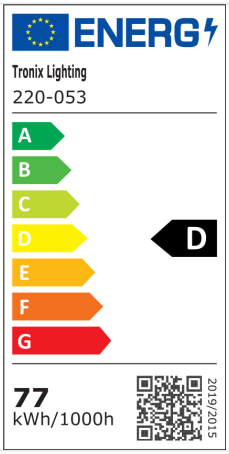

17.11.2026 - Disclaimer: information subject to change.