Tri-proof lightbar | 1500*Ø75,2mm | IP66 | 45W | 5000K

ARTICLE NUMBER: 950-095

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

Ammonia resistant lightbar, ideal for car washes or agro industry. The fixtures can be connected upto 35 pieces and can be mounted with the two included clips.

Features

- High quality PMMA
- 2x DL06-3A IP68 fitting
- 5 years warranty

Technical specifications:

Product Name	Tri-proof lightbar | 1500*Ø75,2mm | IP66 | 45W | 5000K
Ean	8714984942431
Outer box qty	6st
Dimmable	No
Connection type	Push-in clamp
Lamp type	LED not exchangeable
Housing colour	White
Material	Other
Length	150cm
Length	1500mm
Diameter	75.2mm
With movement sensor	No
With presence detector	No
With light sensor	No
Colour of light	White
Colour temperature	5000K
Colour rendering index CRI	80-89
Colour of light adjustable	No
Luminous flux adjustable	No

17.11.2026 - Disclaimer: information subject to change.

Beam angle adjustable	No
Voltage type	AC
Nominal voltage	233 - 233V
Nominal current	201 - 201mA
Number of poles	3
Light distributor	Diffuser lens/optic/panel
Connectable conductor cross section	1 - 2.5mm²
Type of control gear	LED operating device current-controlled
Exchangeable control gear	No
With control gear	Yes
Degree of protection (IP)	IP66
Impact strength	IK06
Rated lifetime L70/B50 at 25 °C	50000h
Max. system power	45W
Rated luminous flux according to IEC 62722-2- 1	5850 - 5850lm
Luminaire efficacy	130lm/W
Power factor	0.93
Type of wiring	Loop-through wiring included
Suitable for emergency lighting	No
Emergency power supply system	None
Emergency function monitoring system	None
Warranty	5 years

17.11.2026 - Disclaimer: information subject to change.












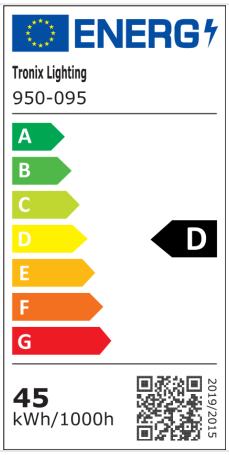

17.11.2026 - Disclaimer: information subject to change.