# Wall lamp || cube 10x10x10cm | white | 6W | 2300K | dim

ARTICLE NUMBER: 149-139

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

This dimmable wall light features a sleek, functional design. The adjustable flaps on both sides can be set up to 120°. The robust aluminum housing with powder coating ensures durability and resistance to various weather conditions.

**Key product features:**

- **Colour temperature (K):** 2300
- **Housing material:** Aluminium
- **Housing colour:** White
- **Max. system power (W):** 6
- **Beam angle adjustable:** Continuously variable
- **Dimmable:** Yes
- **Degree of protection (IP):** IP65

**Technical specifications:**

| | |
|---|---|
| Product Name | Wall lamp \|\| cube 10x10x10cm \| white \| 6W \| 2300K \| dim |
| Ean | 8714984937352 |
| Outer box qty | 20st |
| Lamp type | LED not exchangeable |
| Housing material | Aluminium |
| Housing colour | White |
| Material cover | Other |
| Suitable for emergency lighting | No |
| Nominal current | 26 - 26mA |
| Voltage type | AC |
| Type of control gear | LED operating device current-controlled |
| With control gear | Yes |
| Constant light output (CLO) | No |
| Type of grid | None |
| Nominal voltage | 220 - 240V |

17.11.2026 - Disclaimer: information subject to change.

| | |
|---|---|
| Length | 100mm |
| Width | 100mm |
| Height/depth | 101mm |
| Colour of light | White |
| Colour rendering index CRI | 80-89 |
| Exchangeable control gear | No |
| Dimming 0-10 V | No |
| Dimming 1-10 V | No |
| Dimming DALI | No |
| Dimming phase cut-off (trailing edge) | Yes |
| With movement sensor | No |
| With presence detector | No |
| Impact strength | IK06 |
| With light sensor | No |
| Suitable for surface mounting | Yes |
| Suitable for built-in mounting | No |
| Light distribution | Symmetric/asymmetric |
| Beam angle | Variable beam angle |
| Light outlet | Direct/indirect |
| Dimming RF | No |
| Dimming Zigbee | No |
| Light distributor | Other |
| Surface protection housing | Powder coating |
| Colour consistency (McAdam ellipse) | SDCM3 |
| Rated lifetime L70/B50 at 25 ??C | 50000h |
| Colour of light adjustable | No |
| Luminous flux adjustable | Continuously variable |

17.11.2026 - Disclaimer: information subject to change.


| | |
|---|---|
| Max. system power | 6W |
| Beam angle adjustable | Continuously variable |
| Power factor | 0.91 |
| Type of wiring | Ending |
| Number of poles | 3 |
| Compatible with Casambi | No |
| Luminaire efficacy | 40 - 40lm/W |
| Dimmable | Yes |
| Rated luminous flux according to IEC 62722-2- 1 | 240 - 240lm |
| Emergency power supply system | None |
| Suitable for ceiling mounting | No |
| Connectable conductor cross section | 0.75 - 0.75mm?? |
| Suitable for wall mounting | Yes |
| Suitable for suspended mounting | No |
| Suitable for workplace according to EN 12464-1 | No |
| Degree of protection (IP), front side | IP65 |
| With mounting material | Yes |
| Colour temperature | 2300K |
| With connection cord and plug | No |
| Warranty | 5 years |
| Ambient temperature | -20 - 45??C |


17.11.2026 - Disclaimer: information subject to change.








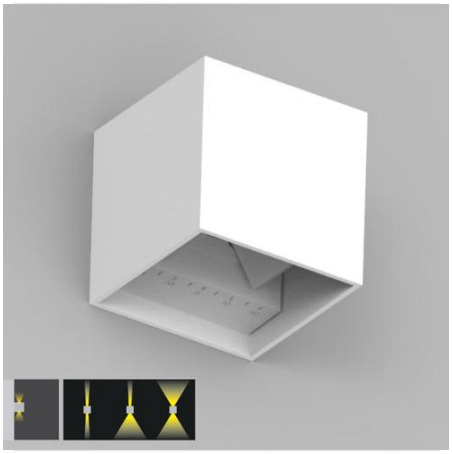



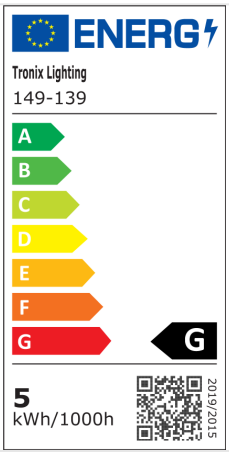
17.11.2026 - Disclaimer: information subject to change.