Waterproof lightbar || 1274*140*90mm | IP65 | 38W | 5000K

ARTICLE NUMBER: 950-083

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

These waterproof light bars are an ideal alternative to fluorescent fixtures. The PC cover has a high light transmission and gives a perfect uniform light output. The light bar is supplied with stainless steel clips for easy assembly and disassembly. The lightbar can be used in factories, warehouses and other locations with high humidity or dust.

Optional: 3 meter suspension cable art.nr. 950-090

Features

- High Lumen/Watt ratio >130 lm/w
- 6063 aluminum mounting plate with perfect cooling
- M20 cable gland with strain relief on both sides
- Including stainless steel clips

Technical specifications:

Product Name	Waterproof lightbar || 1274*140*90mm | IP65 | 38W | 5000K
Ean	8714984942400
Outer box qty	9st
Dimmable	No
Connection type	Push-in clamp
Lamp type	LED not exchangeable
Housing colour	Grey
Material	Plastic
Length	120cm
Length	1274mm
Width	140mm
Height/depth	90mm
With movement sensor	No
With presence detector	No
With light sensor	No


17.11.2026 - Disclaimer: information subject to change.


Colour of light	White
Colour temperature	5000K
Colour rendering index CRI	80-89
Colour of light adjustable	No
Luminous flux adjustable	No
Beam angle adjustable	No
Voltage type	AC
Nominal voltage	200 - 240V
Nominal current	700 - 700mA
Number of poles	3
Light distributor	Diffuser lens/optic/panel
Connectable conductor cross section	1 - 2.5mm??
Type of control gear	LED operating device current-controlled
Exchangeable control gear	No
With control gear	Yes
Degree of protection (IP)	IP65
Impact strength	IK08
Rated lifetime L70/B50 at 25 ??C	30000h
Max. system power	38W
Rated luminous flux according to IEC 62722-2- 1	4560 - 4560lm
Luminaire efficacy	120lm/W
Power factor	0.9
Type of wiring	Loop-through wiring included
Suitable for emergency lighting	No
Emergency power supply system	None
Emergency function monitoring system	None


17.11.2026 - Disclaimer: information subject to change.

Warranty	3 years



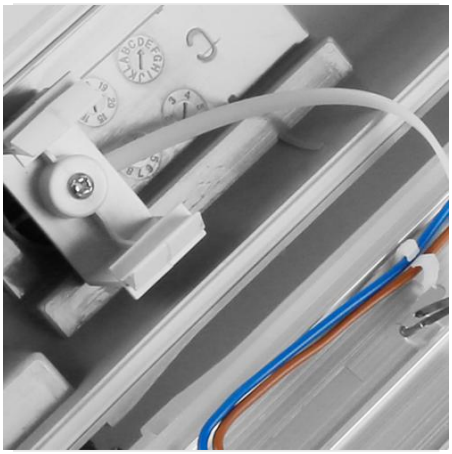



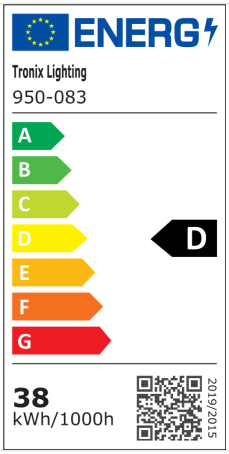

17.11.2026 - Disclaimer: information subject to change.