TRONIX guided by light

RF | power supply | 24V | 40W

ARTICLE NUMBER: 213-701

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

RF LED driver with Push-dim function for single-colour LED lighting. Combines wireless control with operation via a standard push button and delivers a stable 24 V output with a maximum power of 40 W.

Key product features

- **Control method:** RF
- **Number of colour channels:** 1
- **Output voltage (V):** 24 – 24
- **Input voltage (V):** 220 – 240
- **Output current (A):** 1.67
- **Control type:** Voltage controlled


Technical specifications:

Product Name	RF | power supply | 24V | 40W
Ean	8714984954205
Outer box qty	100st
Housing	Plastic housing
Model	Static
Output voltage	0 - 24V
Output current	0 - 1.67mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	No
Output power	0 - 40W
Degree of protection (IP)	IP20
Length	151.5mm
Width	45mm
Height	23.5mm
Power consumption	40W

17.11.2026 - Disclaimer: information subject to change.

Input voltage	220 - 240V
Frequency input voltage	50 - 60Hz
Overload protection	Yes
Overtemperature protection	Yes
Control method	RF
Short-circuit protected	Yes
Ambient temperature	-20 - 45??C
Driver lifetime	50000h
Number of colour channels	1
DIN-rail mounting	No
Brand	Tronix Lighting
Dimmable	Yes
Emergency power supply system	None
Control type	Constant voltage
Warranty	5 years

17.11.2026 - Disclaimer: information subject to change.

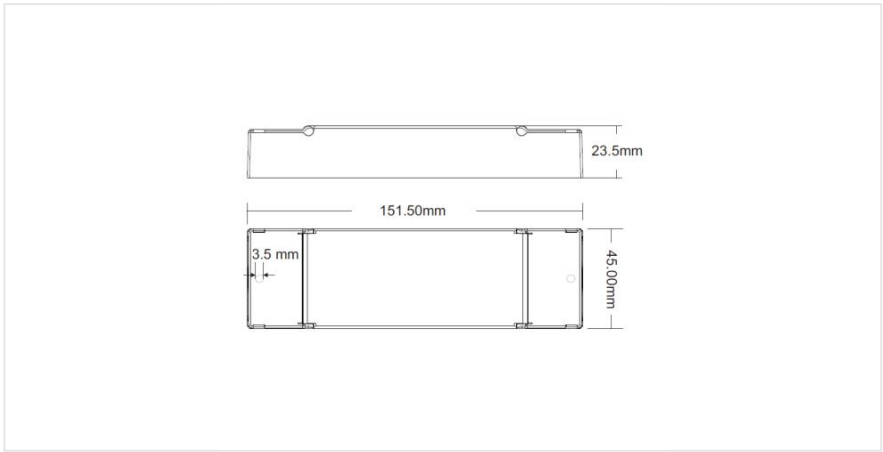

17.11.2026 - Disclaimer: information subject to change.