Casambi | driver | 25W | 250~700mA | max. 54V | NFC | TW

ARTICLE NUMBER: 214-227

View this product in our webshop

CASAMBI



17.11.2026 - Disclaimer: information subject to change.

Casambi-dimmable LED driver (25W) with 2 channels for Tuneable White applications. Output current adjustable via NFC; control via Casambi app or push-dim. Compact, efficient, and designed for professional indoor lighting.

Key product features

- **Suitable for constant current:** Yes
- **Output voltage (V):** 6 – 54
- **Output current (mA):** 250 – 700
- **Output power (W):** 1.5 – 25
- **Input voltage (V):** 200 - 240
- **Control method:** Casambi
- **Driver type:** Constant current

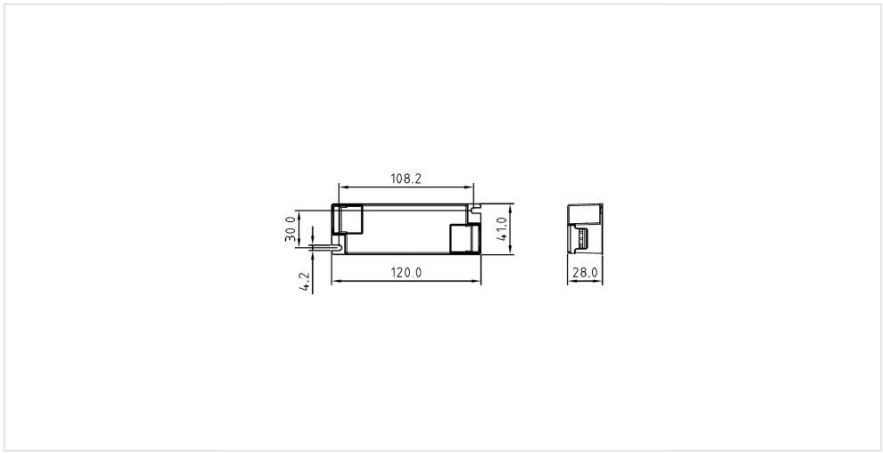
Technical specifications:

Product Name	Casambi | driver | 25W | 250~700mA | max. 54V | NFC | TW
Ean	8714984952362
Outer box qty	1st
Housing	Plastic housing
Model	Dynamic
Output voltage	6 - 54V
Output current	250 - 700mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	Yes
Output power	1.5 - 25W
Degree of protection (IP)	IP20
Length	120mm
Width	41mm
Height	28mm
Power consumption	25W

17.11.2026 - Disclaimer: information subject to change.

Input voltage	196 - 264V
Frequency input voltage	0 - 60Hz
Overload protection	Yes
Overtemperature protection	Yes
Control method	Casambi
Short-circuit protected	Yes
Ambient temperature	-25 - 45??C
Driver lifetime	100000h
DIN-rail mounting	No
Brand	Tronix Lighting
Dimmable	Yes
Emergency power supply system	Central (central battery)
Control type	Constant current
Warranty	5 years

17.11.2026 - Disclaimer: information subject to change.


108.2
30.0
41.0
120.0
4.2
28.0