TRONIX guided by light

LED strip|| 12V | 120LED/m TW | 5m | IP20 | 2700-6000K

ARTICLE NUMBER: 127-063

View this product in our webshop



17.11.2026 - Disclaimer: information subject to change.

12V tuneable white LED strip 2700K ~ 6000K with 3M adhesive tape on the back for easy installation.

Maximum 5 meters of LED strip in one single length. Looking to connect multiple lengths to one single power supply? In that case, choose separate LED strips of up to 5 meters each. For a 10-meter run, simply power the strip from both ends.

Features

- IP20 for indoor use
- High color rendering index CRI>90
- Constant color temperature MacAdam: <3
- Long lifespan of 54.000 hours (L70)
- Double layer PCB for good heat dissipation

Technical specifications:


Product Name	LED strip|| 12V | 120LED/m TW | 5m | IP20 | 2700-6000K
Ean	8714984911406
Outer box qty	25st
Model	Strip
Lamp type	LED not exchangeable
Lamp voltage	0 - 12V
Number of nodes per meter	120
Lamp power per meter	9.6W
Beam angle	120°
Voltage type	DC
Type of control gear	LED operating device voltage-controlled
Input voltage tracklights	12V
With protective cover	No
Length of particular segments	50mm


Degree of protection (IP)	IP20
Self-adhesive	Yes
Luminous flux per meter	676lm
Total length	5m
Width	10mm
Height/depth	2mm
Colour of light	White
Suitable for dimmer	Yes
Colour rendering index CRI	90-100
Exchangeable control gear	Yes
Connection type	Other
Rated lifetime L70/B50 at 25 °C	54000h
Colour of light adjustable	Continuously variable
Luminous flux per foot	206.04lm
Luminous flux adjustable	Continuously variable
LED type	SMD
Max. system power	48W
Beam angle adjustable	No
Luminaire efficacy	70.4lm/W
Power factor	1
Type of wiring	Loop-through wiring included
Number of poles	3
Connectable conductor cross section	0.5 - 2.5mm²
Colour temperature	Tuneable White
Warranty	3 years
Ambient temperature	-20 - 50°C
Lowest bending radius	50mm

17.11.2026 - Disclaimer: information subject to change.







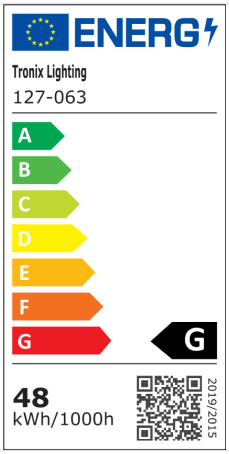

17.11.2026 - Disclaimer: information subject to change.