# Philips driver | output prog. 0.3 - 1.05A | 36W | DALI dim

ARTICLE NUMBER: 215-265

View this product in our webshop

Xitanium Driver



17.11.2026 - Disclaimer: information subject to change.

This Philips Xitanium LED driver can be set via SimpleSet in an output of 0.3 to 1.05A. SimpleSet is the latest technology from Philips which makes it possible to wireless adjust the LED driver via NFC to a desired output. This means that only one LED driver is needed for multiple applications.

This product will soon be branded as Xitanium by Signify.

**Features**

- Easily install the MultiOne Configurator Software.
- Connect the MultiOne SimpleSet Interface and choose the Xitanium LED program configuration.
- Place the LED Driver to be configured on the SimpleSet platform with USB connection **(exclusive, available on request)**.
- The software displays a green check mark to confirm the configuration.
- Didn't choose the right output? Reprogramming with SimpleSet can easily be done in the same way.


**Not in possession of the MultiOne Software?** Ask us to configure the SimpleSet drivers for you! sales@tronixlighting.com or +31 (0) 413 330 380.

**Technical specifications:**

| | |
|---|---|
| Product Name | Philips driver \| output prog. 0.3 - 1.05A \| 36W \| DALI dim |
| Ean | 8714984932715 |
| Outer box qty | 36st |
| Housing | Plastic housing |
| Model | Static |
| Output voltage | 5 - 54V |
| Output current | 300 - 1050mA |
| Suitable for outdoor use | No |

| | |
|---|---|
| Suitable for DC-voltage (primary side) | No |
| Output power | 0.03 - 36W |
| Degree of protection (IP) | IP20 |
| Length | 155mm |
| Width | 42.7mm |
| Height | 21.2mm |
| Power consumption | 36W |
| Input voltage | 220 - 240V |
| Frequency input voltage | 50 - 60Hz |
| Overload protection | Yes |
| Overtemperature protection | Yes |
| Control method | DALI |
| Short-circuit protected | Yes |
| Ambient temperature | -20 - 50??C |
| Driver lifetime | 50000h |
| DIN-rail mounting | No |
| Brand | Philips |
| Dimmable | Yes |
| Emergency power supply system | None |
| Control type | Constant current |
| Warranty | 5 years |



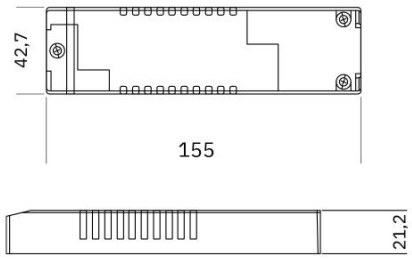


17.11.2026 - Disclaimer: information subject to change.