# Philips power supply | 24V | IP20 | 30W | DALI dimmable V2

ARTICLE NUMBER: 215-453

View this product in our webshop

Xitanium Driver

PHILIPS




17.11.2026 - Disclaimer: information subject to change.

This sturdy Philips LED driver has a maximum output of 30W and 24V and is extremely well suited for use with various light sources. In addition, the compact size makes the driver easy to place.

This product will soon be branded as Xitanium by Signify.

**Features**

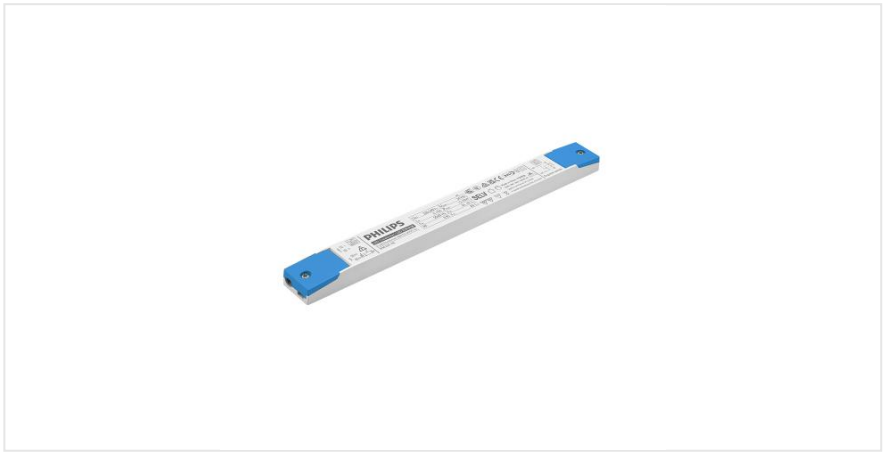
- Output current 0 ~ 1250 mA
- Output power 0 ~ 30 Watt
- Compact size 300*30*16 mm
- Includes strain relief to connect a 24V fixture directly to the power supply
- Optionally dimmable thanks to the DALI 2 protocol

**Technical specifications:**

| | |
|---|---|
| Product Name | Philips power supply \| 24V \| IP20 \| 30W \| DALI dimmable V2 |
| Ean | 8714984951143 |
| Outer box qty | 50st |
| Housing | Plastic housing |
| Model | Static |
| Output voltage | 24 - 24V |
| Output current | 0 - 1250mA |
| Suitable for outdoor use | No |
| Suitable for DC-voltage (primary side) | No |
| Output power | 0 - 30W |
| Degree of protection (IP) | IP20 |
| Length | 300mm |
| Width | 30mm |
| Height | 16mm |
| Power consumption | 30W |

17.11.2026 - Disclaimer: information subject to change.

| | |
|---|---|
| Input voltage | 198 - 264V |
| Frequency input voltage | 47 - 63Hz |
| Overload protection | Yes |
| Overtemperature protection | Yes |
| Control method | DALI |
| Short-circuit protected | Yes |
| Ambient temperature | -25 - 45??C |
| Driver lifetime | 50000h |
| DIN-rail mounting | No |
| Brand | Philips |
| Dimmable | Yes |
| Emergency power supply system | None |
| Control type | Constant voltage |
| Warranty | 5 years |
| Suitable for DIN rail (top hat rail) mounting | No |
| Interface Pulse Width Modulation (PWM) | No |


PHILIPS